



Circular Saw  
5008MG / 5008MGA 210mm (8-1/4")

# MAGNESIUM

**Very Deep Cut**  
Max. cutting depth of  
**75.5mm (3")**



Photo : 5008MGA




## Comparison of Cutting Efficiency

Note: 1. It may differ under some conditions.


2. Numbers in the charts below are relative values when the capacities of Makita Model 5008B are indexed at 100.

Blade used for tests: 210mm (8-1/4") saw blade supplied with each model\*

Test material: 2x10" (38x230mm) SPF timber  
Bevel angle: 0 degree

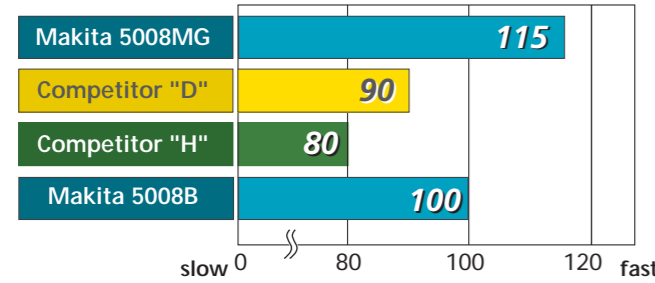

Test material: 60x300mm Douglas fir  
Bevel angle: 0 degree

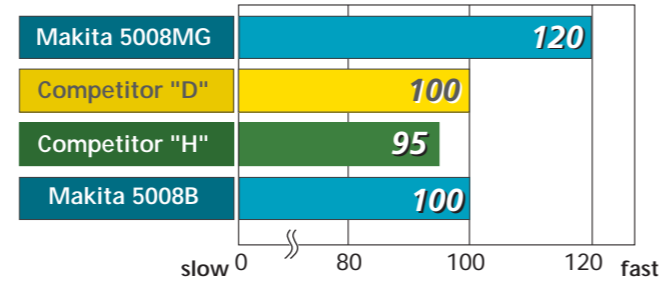

\*The number of the teeth of the saw blade: 24T=Makita 5008MG, Competitor D 20T=Makita 5008B, Competitor H

## Circular Saw

- Double insulation
- Electric Brake (5008MGA only)
- Built-in Job Light



## 5008MG / 5008MGA 210mm (8-1/4")

Continuous rating Input Capacity	1,800W at 90 degrees : 75.5mm (3") at 45 degrees : 57mm (2-1/4")
Blade diameter	210mm (8-1/4")
No load speed (rpm)	5,200
Dimensions	332 x 243 x 277mm (13-1/8" x 9-9/16" x 10-7/8")
Net weight	4.8kg (10.6lbs)
Power supply cord	2.5m (8.2ft)

Standard Equipment TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

Items of standard equipment and specifications may differ by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23334-2 2007-09

**Less weight yet with high rigidity**

Photo: 5008MG

