

SPECIFICATIONS

Max. cutting capacity (height x width)

Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut
115 mm x 308 mm (4-1/2" x 12-1/8")	45° left: 115 mm x 218 mm (4-1/2" x 8-5/8") 45° right: 115 mm x 218 mm (4-1/2" x 8-5/8")	45° left: 66 mm x 305 mm (2-5/8" x 12") 45° right: 45 mm x 305 mm (1-3/4" x 12")	45° left: 66 mm x 170 mm (2-5/8" x 6-11/16") Wood facing 15 mm (9/16") thick 71 mm x 155 mm (2-13/16" x 6-1/8") 45° right: 66 mm x 215 mm (2-5/8" x 8-1/2") Wood facing 15 mm (9/16") thick 71 mm x 175 mm (2-13/16" x 6-7/8")
Wood facing 20 mm (3/4") thick	45° left: Wood facing 15 mm (9/16") thick 120 mm x 185 mm (4-3/4" x 7-1/4")	45° left: Wood facing 20 mm (3/4") thick 71 mm x 260 mm (2-13/16" x 10-1/4")	45° left: 45 mm x 215 mm (1-3/4" x 8-1/2") 45° right: Wood facing 15 mm (9/16") thick 45 mm x 185 mm (1-3/4" x 7-1/4")
120 mm x 270 mm (4-3/4" x 10-5/8")	45° right: Wood facing 15 mm (9/16") thick 120 mm x 185 mm (4-3/4" x 7-1/4")	45° right: Wood facing 20 mm (3/4") thick 50 mm x 260 mm (2" x 10-1/4")	45° left & right: Wood facing 15 mm (9/16") thick 45 mm x 185 mm (1-3/4" x 7-1/4")


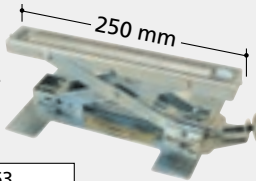



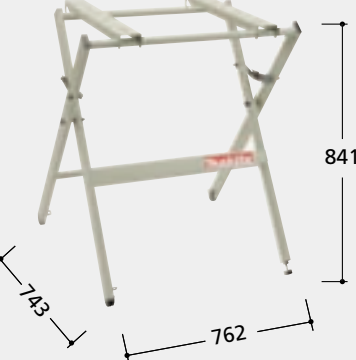




Continuous rating (Input)	1,650 W
Blade diameter	305 mm (12")
No load speed	3,200 min ⁻¹ (rpm)
Dimensions (L x W x H)	520 mm x 723 mm x 696 mm (20-1/2" x 28-1/2" x 27-1/2")
Net weight	23.8 kg (52.5lbs)
Power supply cord	2.5 m (8.2 ft.)

STANDARD EQUIPMENT


T.C.T Saw Blade (B-03822)	Dust Bag (122523-9)	Switch Button (411478-6)	Holder (322312-4)
Socket Wrench (782223-9)	Vertical Vise (122571-8)	Triangular Rule (762001-3)	

OPTIONAL ACCESSORIES

Carbide-tipped saw blade 								Auxiliary Roller Weight 2.0 kg (4.4 lbs) Has 60 kg (132 lbs) capacity. 	
Material	Blade diameter (mm)	Hole diameter (mm)	Ring Size	Tip thickness (mm)	Hook angle	No. teeth	Part No.	Part No.	A-05963
Wood	305	25.4	-	2.6	5°	60	A-85472	Adjust 47~140mm	
	305	25.4	-	2.3	5°	60	B-02808		
	305	25.4	-	2.3	5°	96	B-02814		
Aluminum	305	25.4	-	2.4	5°	100	B-02820		
Holder assembly Use each 2 pieces of Rod 12 (256812-1) and Holder assembly (192671-8) for supporting long stock. 		Set plate (For cutting into identical lengths) 		Stand Weight 9.9 kg (21.8 lbs) 					
Part No.	192671-8	Part No.	122472-0	Part No.	194043-3	(mm)			
		Horizontal vise assembly 							
		Fluorescent light set 							
		Part No. 122470-4							
		Part No. 193730-1							



Slide Compound Saw 305 mm (12") LS1214/ F

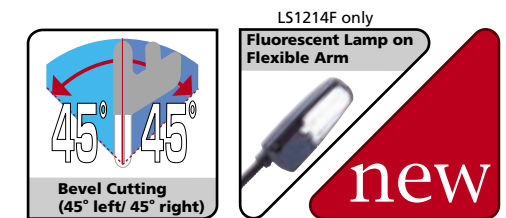

12" VERSION OF MAKITA LEGENDARY MODEL LS1013.




Photo: LS1214F



DUAL RAILS WITH LINER BALL BEARINGS FOR SMOOTH AND ACCURATE CUTTING

Large Turn Base

A variety of materials can bestably put on this large turn base. With the capacity of miter cuts up to 52° right and 47° left

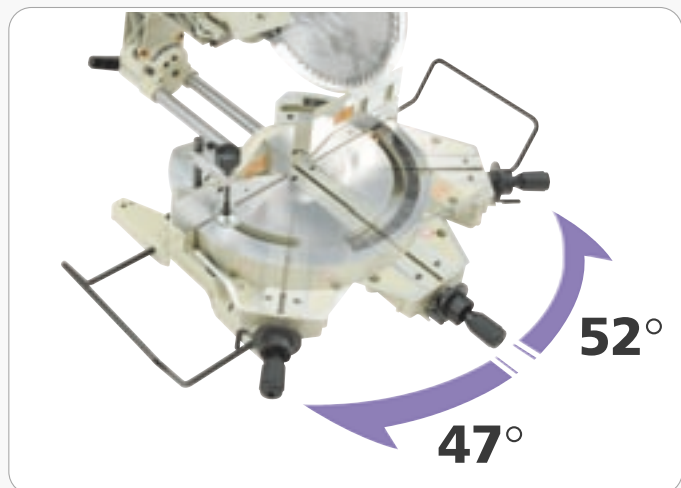


Max Cutting Capacity 115 mm (high)

Big cutting capacity with 305mm saw blade.



Bevel Cuts with Positive Stop at 33.9° Left

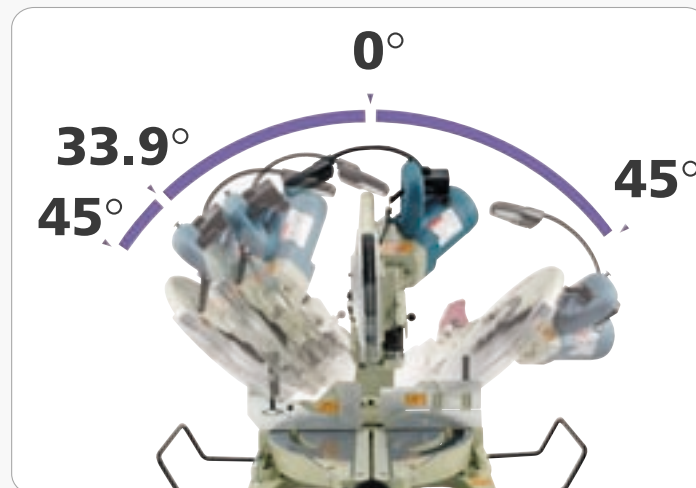

Adjustable High Sub Fence

to cradle crown molding or Skirting Board against Saw base & Fence.



Fluorescent Lamp on Flexible Arm

For a clear view of cutting lines, uses the inverter type that can throw bright light widely on and around workpiece.(LS1214F)

