



# Cordless Screwdriver

Satisfy Professional's Needs

BFS451 **18V**  
LITHIUM-ION

BFS441 **14.4V**  
LITHIUM-ION



## Best possible tool body for Screwdriving

# Well balanced tool design for easy handling and maneuverability



Photo : BFS451

## Best possible tool body for screwdriving

- ergonomically designed to;
- minimize hand fatigue and pain even in long continuous operation.
  - give maximum power thrust.
  - allow for much smoother and easier trigger pull.
  - provide comfortable grip and better control with enlarged non-slip elastomer.

### One-touch locator

allows for easy locator installation/ removal with a single action.

### Variable speed control switch

provides easier operation for fine adjustment of screw depth without locator.

### LED job light

- with afterglow function
- convenient for operation in dark job sites
  - keeps on illuminating about 12-13 seconds after trigger release.




### Silent clutch

- High durability
- Direct drive in reverse rotation enables to remove screws without dismantling locator for higher productivity.

## Comparison of Efficiency

Drove 25mm drywall screws through a 12.5mm thick plasterboard into SPF timber.

Note: 1. The test results depend to a great extent on the hardness of the material, etc.  
2. Numbers in the charts below are relative values when the capacities of Competitor "H" are indexed at 100.

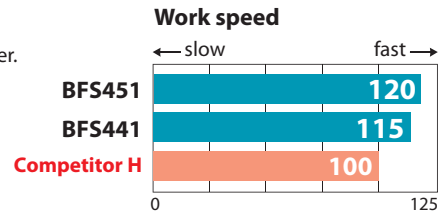

## Accessories

### 18V battery

- Higher capacity**  
BL1830: 3.0Ah  
**Lightweight**  
BL1815: 1.3Ah



### 14.4V battery

- Higher capacity**  
BL1430: 3.0Ah  
**Lightweight**  
BL1415: 1.3Ah



### Fast Charger

- DC18RA  
Charging time  
3.0Ah - 22min.  
1.3Ah - 15min.



### Fast Charger

- DC18RC  
Charging time  
3.0Ah - 22min.  
1.3Ah - 15min.



### Charger

- DC18SD  
Charging time  
3.0Ah - 60min.  
1.3Ah - 30min.



### Phillips insert bit

- (3 per pkg.)  
Ph 2-25: Part No. 798398-4  
Ph 3-25: Part No. 798314-6



### Magnetic bit holder

- Type MZ (For insert bit)  
6.35-60 : Part No. 784811-8  
6.35-76 : Part No. 784801-1



### Locator assembly

- Short : Part No. 195602-6  
Long : Part No. 195542-8



## Cordless Screwdriver

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case



## BFS451 / BFS441

440

	BFS451 -18V	BFS441 -14.4V
<b>Capacity</b>	Drywall screw : 4mm (5/32")	Drywall screw : 4mm (5/32")
<b>Driving shank (Hex)</b>	6.35mm (1/4")	6.35mm (1/4")
<b>No load speed (rpm)</b>	0 - 4,000	0 - 4,000
<b>Dimensions</b>	281x80x224mm	281x80x224mm
<b>(L x W x H)</b>	(11-1/8"x3-1/8"x8-7/8")	(11-1/8"x3-1/8"x8-7/8")
<b>Net weight*</b>	1.5kg (3.3lbs)	1.4kg (3.2lbs)

**Standard Equipment :** Fast Charger, Battery Cartridge, Phillips Bit, Magnetic Connect Bit

\*Weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BB-AH