



**Cordless**  
**Slide Compound Miter Saw**  
**BLS713 190mm (7-1/2")**

Satisfy Professional's Needs



***Compact but does  
 your job***



	<b>Bevel Cut at 45° left</b>	<b>Cross Cut</b>	<b>5° right</b>
<b>Miter at 0°</b> 	25 x 300 mm (1" x 11-3/4")	52 x 300 mm (2-1/16" x 11-3/4")	40 x 300 mm (1-9/16" x 11-3/4")
<b>Miter at 45°</b> 	25 x 212 mm (1" x 8-3/8")	52 x 212 mm (2-1/16" x 8-3/8")	-
<b>Miter at 57°</b> 	—	52 x 163 mm (2-1/16" x 6-3/8")	-

# Now Free from Cord

for easy job site portability.



## Powered by 18V/3.0Ah Li-ion battery BL1830


able to provide sufficient power to cut interior materials such as baseboards, crown moldings, window frames.



## Double sliding mechanism

Makita advantages obtained by using 4 short steel poles instead of 2 long poles are:

- Vibration-free, precise and exact cutting
- Compact tool design for jobsite portability despite the large cutting capacity of 300mm

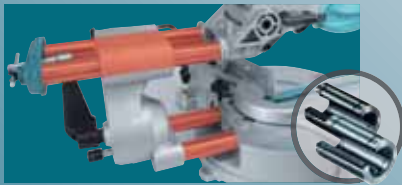

4 linear ball bearings are used to support the 4 poles for smooth and precise sliding cut.

**Soft elastomer carrying grip**  
provides sure but comfortable grip for easy job site portability.

**Electric brake**  
for minimum time interval between cutting operations

**Externally accessible carbon brushes**  
for easy brush replacement



## Bevel cut range from 45 degrees left to 5 degrees right



45 degrees left

0 degrees

5 degrees right

## Miter range of 47 degrees left and 57 degrees right



47 degrees left

0 degrees

57 degrees right

## Quick and accurate miter angle lock

- Miter angle can be locked/unlocked simply by turning the knob 90 degrees.
- With positive stops at 0, 15, 22.5, 31.6, 45 degrees

## Accessories

### Charger DC18RA

Charging time approx. 22 minutes



### Charger DC18SD

Charging time approx. 60 minutes




### Stand Part No. 194943-7




### Vertical vise assembly Part No. 122571-8



### Set plate Part No. 122472-0



### Horizontal vise assembly Part No. 122567-9



### Holder set

holder 2pc, thumb screw 2pc  
Part No. 192621-3




### TCT Saw Blade

Blade dia. 190mm  
Hole dia. 20mm



Tip (mm)	Hook angle (dig)	No. teeth	Part No.
2.2	5	24	B-03850
2.0	-5	24	B-03866
2.0	10	40	A-86751
2.0	5	60	B-04008
2.0	-5	60	B-03981
2.0	10	72	A-86359


Hook angle, Positive or Negative



## Cordless Slide Compound Miter Saw



Brake



Bevel Cutting  
L45 R5



Dust Collecting



## BLS713 190mm (7-1/2")

441

### Max. cutting capacity

at 0 degrees : 52 x 300mm (2-1/16" x 11-3/4")  
at 45 degrees : 52 x 212mm (2-1/16" x 8-3/8")

### Blade diameter

190mm (7-1/2")

### No load speed (rpm)

2,200

### Dimensions (L x W x H)

655 x 430 x 454mm (25-3/4" x 17" x 17-7/8")

### Net weight\*

12.7kg (28.0lbs)

### Voltage

18V

\*weight according to EPTA-Procedure 01/2003

Standard Equipment TCT Saw Blade, Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder set

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BA-BB