



**Cordless Impact Driver  
DTD155**



# 3-mode operations

## A-mode + 2 impact power selections

(Assist mode)                      (Soft/ Hard)

## for multiple applications



*Max Fastening Torque*

# 140 N·m



# Slim motor housing thanks to compact BL motor

**Aluminum hammer case**

**135mm**

**55mm**

**Twin LED job light**  
with preglow and afterglow functions

**Variable speed control by trigger**

**Impact power selection:**  
(Soft/ Hard)

**Predecessor Model**


**BL MOTOR XPT**  
EXTREME PROTECTION TECHNOLOGY

**Best possible ergonomic handle for screwing applications**

**A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened to perfectly fit the U-shape formed between user's thumb and index finger.

**B** Ribbed soft grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.

**A-mode (Assist mode)**

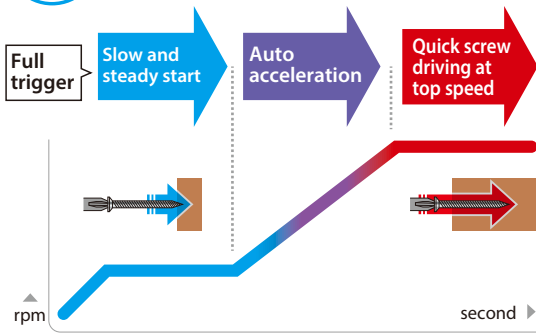

## Powered by 18V Li-ion battery

with Battery fuel gauge

- BL1860B: 6.0Ah
- BL1850B: 5.0Ah
- BL1840B: 4.0Ah
- BL1830B: 3.0Ah
- BL1820B: 2.0Ah
- \*BL1815N: 1.5Ah

\*(without Battery fuel gauge)



BL1850B

## Fast Charger

DC18RC



## Charger

DC18SD



## Cordless Impact Driver

## DTD155

- Variable Speed
- Brake
- Reversing
- Electronic 2-Speed
- Built-in Job Light
- Carrying Case

<b>Capacity</b>	Machine screw: M4 - M8mm (5/32" - 5/16") Standard bolt: M5 - M14 (3/16" - 9/16") High strength bolt: M5 - M12 (3/16" - 1/2") Coarse thread (in length): 22-90mm (7/8" - 3-1/2")
<b>Hex Shank</b>	6.35 mm (1/4")
<b>No Load Speed (RPM)</b>	Hard/soft: 0 - 3,000 / 0 - 1,300
<b>Impacts Per Minute (IPM)</b>	Hard/soft: 0 - 3,900 / 0 - 1,600
<b>Max Fastening Torque</b>	140 N·m (1,240 in.lbs.)
<b>Vibration Level</b>	14.0 m/s <sup>2</sup>
<b>Sound Pressure Level</b>	94dB(A)
<b>Sound Power Level</b>	105dB(A)
<b>Dimensions (L x W x H)</b>	135x79x232mm (5-5/16"x3-1/8"x9-1/8")
<b>Net weight</b>	1.2 kg (2.6 lbs)

**Standard Equipment:** Battery, Charger, Belt Clip

weight according to EPTA-Procedure 01/ver.2.1

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201701