

Makita[®]

Portable Cut-Off
2414EN 355mm (14")

Satisfy Professional's Needs

**Powerful motor
makes cutting easy.**



Increased cutting visibility

achieved by using Single safety cover instead of Dual one.



Carry handle for easy transportation




Shaft lock for easy replacement of abrasive cut-off wheel



Adjustable guide plate 45degrees right and left at 3 positions



Large sized Spark guard prevents scattering of spark.

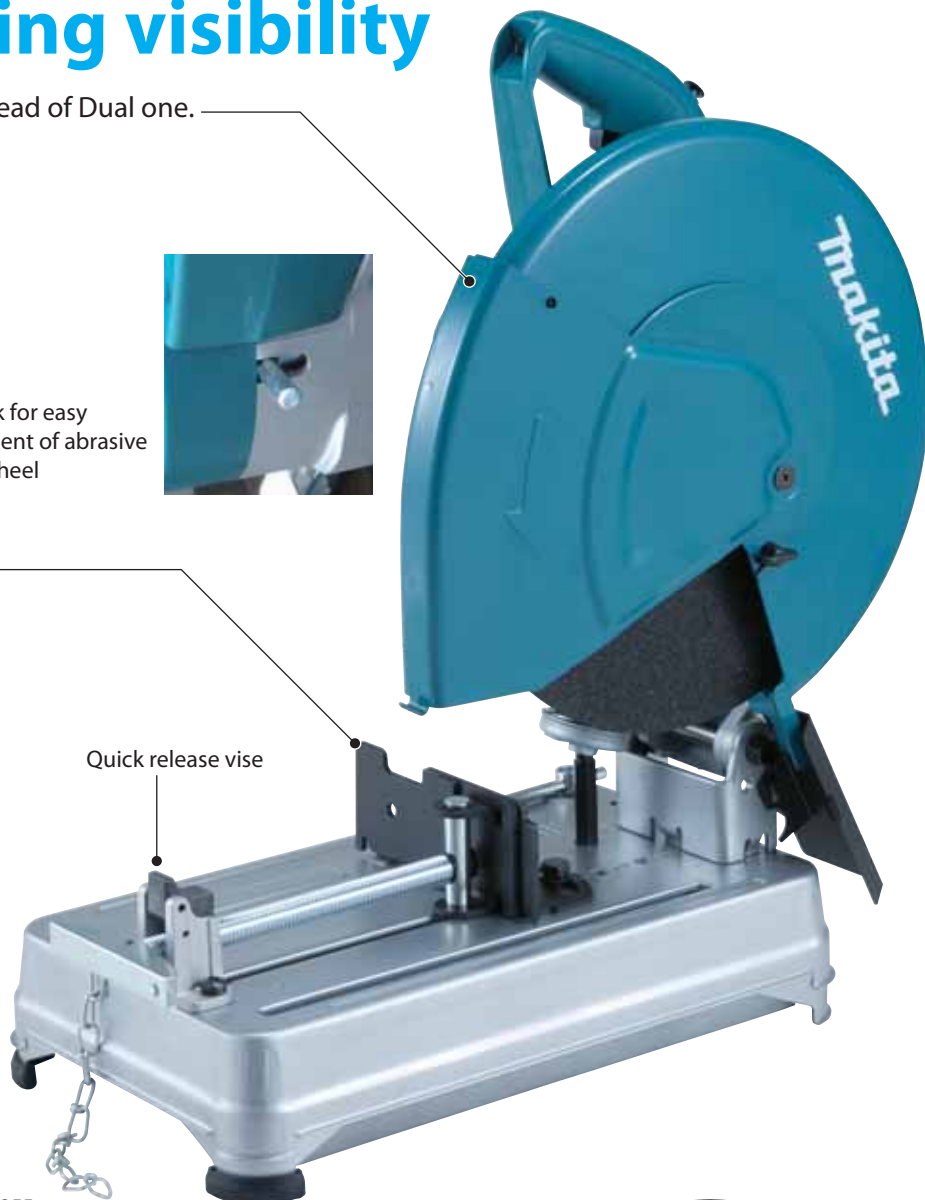

Quick release vise

Cutting Capacity * with Abrasive cut-off wheel 355

Form of materials	Miter angle	
	0°	45°
 D	D: ø115mm (4-1/2")	D: ø115mm (4-1/2")
 W H	H x W: 102 x 194mm (4" x 7-5/8") 70 x 233mm (2-3/4" x 9-1/8")	H x W: 115 x 103mm (4-1/2" x 4-1/16")
 W H	H x W: 119 x 119mm (4-11/16" x 4-11/16")	H x W: 106 x 106mm (4-3/16" x 4-3/16")
 S T	S x S: 137 x 137mm, T: 10mm (5-3/8" x 5-3/8", 3/8")	S x S: 100 x 100mm, T: 10mm (4" x 4", 3/8")

D: Diameter W: Width H: Height S: Side T: Thickness

Accessory Abrasive cut-off wheel

For all ferrous materials (Steel, cast iron) and other hard metals.

*These items are available on request. Contact us for the minimum order quantity.

Size (mm): 355x3x25.4
Grit: A36P
G.F.Q'ty: 1.0G

Per pkg.	Part No.
5	*A-89545-5
25	*A-89545-25
5	*A-89953-5
5	*B-10730-5
25	*B-10730-25
5	*B-10665-5
25	*B-10665-25

Double Reinforced Abrasive cut-off wheel

Size (mm): 355x3x25.4
Grit: A30P
G.F.Q'ty: 2.0G

Per pkg.	Part No.
5	*B-16891-5
25	*B-16891-25

Portable Cut-off 2414EN 355mm (14") 203

Double Insulation

Standard Equipment :
Abrasive Cut-Off Wheel,
Socket Wrench

Continuous rating Input	2,000W
Wheel diameter	355mm (14")
Hole dia.	25.4mm (1")
No load speed (rpm)	3,800
Dimensions (L x W x H)	500x280x620mm (19-3/4"x11"x24-3/8")
Net Weight*	17.6kg (38.7lbs)
Power supply cord	2.5m (8.2ft)

*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BC-AI