




Recipro Saw JR1000FT, JR1000FTK


In-line Jigsaw?

Mini-Reciprosaw?
Multi-tool?

To Cut, Grind, Debur, Sand
Wood, Metal, Foam, Rubber,
Cardboard and Leather.

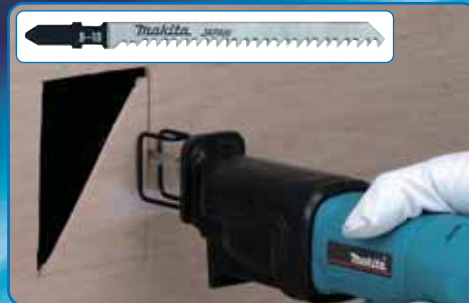


Lightweight and Compact



Blade teeth

Direction of blade

The direction of blade teeth or the abrasive surface can face the upper side.



Adjustable Shoe

Can slide backward and forward to be set at the desired position.



Toolless Blade Clamp

B type shank jig saw blade etc. can be installed merely by pushing the holder cover to insert the two protrusions into its slot.



Easy-to-Operate Large Paddle Switch with Variable Speed Control

Allows you to adjust the stroke speed by increasing or decreasing a pressure given to switch lever.

Speed Change Dial enables you to select the maximum stroke speed when pressing the switch lever to the limit.






LED (Light Emitting Diode)

Can project the light to the workpiece to show the mark clearly even in the dark workplace.

Recipro Saw

JR1000FT / JR1000FTK

419

-  Double Insulation
-  Variable Speed
-  Carrying Case (JR1000FTK only)



Specification

Continuous rating Input	340 W
Capacities	in pipe : 25.4 mm (1") in wood : 55 mm (2-3/16")
Length of stroke	14 mm (9/16")
Strokes per min.	0-4,800
Dimensions (L x W x H)	345 mm x 65 mm x 96 mm (13-5/8" x 2-9/16" x 3-3/4")
Net weight	1.5 kg (3.3 lbs)
Power supply cord	2.5 m (8.2 ft.)

Standard equipment

JR1000FT



No. B-8, B-10, B-30 (each 1 pc.)

Hex. wrench

JR1000FTK



No. B-8, B-10, B-195, B-225, B-245, B-30 (each 1 pc.), B-K (each 2 pcs.)




Round File (1 pc.)



Flat File (1 pc.)



Sanding adapter (Use with Abrasive Paper)



Abrasive Paper #60, #120 (each 10 pcs.)



Plastic carrying case

Hex. wrench



Items of standard equipment and specifications may differ from country to country.



Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPANZ23194-2 2005-9