



Finishing Sander 9035H

Ergonomically contoured grip design with Soft elastomer grip

fits your palm perfectly to provide maximum comfort and control while minimizing hand fatigue and pain.



Ergonomically contoured grip design

Soft elastomer grip



Trigger switch conveniently located for easy on/off operation

High power

The sanding efficiency is the same or higher than that of the current model.


Sanding efficiency comparison

Note

1. The test results depend to a great extent on the hardness of materials, etc.
2. The numbers in the bar chart below is relative values when the capacities of Model 9035H is indexed at 100.

Test conditions

Sanded Douglas-fir with a push load of 3 kgf continuously for 15 minutes using 1.5mm²x 50m cord reel, and measured the amount of the material sanded off.

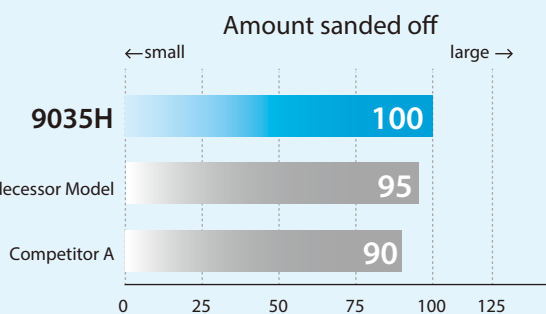

Rubberized paper clamp levers for easy installation/removal of paper

Double Insulation

Continuous rating Input	180W
Pad size	93 x 185mm (3-5/8" x 7-1/4")
Abrasive paper size	93 x 228 mm (3-5/8" x 9")
Orbits per minute (opm)	11,000
Dimensions (L x W x H)	236x93x146mm (9-1/4"x3-5/8"x5-3/4")
Net weight*	1.5kg (3.3lbs)
Power supply cord	2.5m (8.2ft)

419

Standard Equipment : Abrasive Papers 6

*weight according to EPTA-Procedure 01/2003
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-AG