



Finishing Sander BO4510H

Ergonomically contoured palm grip design with Soft elastomer grip



fits your palm perfectly to provide maximum comfort and control while minimizing hand fatigue and pain.




Sanding efficiency comparison

Note


1. The test results depend to a great extent on the hardness of materials, etc.
2. The numbers in the bar chart below is relative values when the capacities of Competitor A is indexed at 100.

Test conditions

Sanded Douglas-fir with a push load of 3 kgf continuously for 15 minutes using 1.5mm²x 50m cord reel, and measured the amount of the material sanded off.

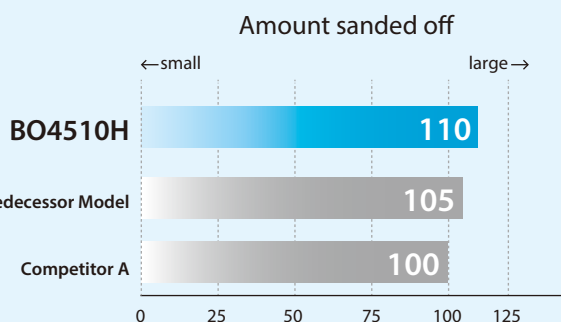

Plastic coated paper clamp levers
for easy installation/removal of paper



Round base corners
protect the workpiece from damage and scratches.

Double Insulation

Continuous rating Input	170W
Pad size	110 x 100mm (4-5/16" x 3-15/16")
Abrasive paper size	114 x 140mm (4-1/2" x 5-1/2")
Orbits per minute (opm)	12,000
Dimensions (L x W x H)	116x110x129mm (4-9/16"x4-5/16"x5-1/8")
Net weight*	1.1kg (2.4lbs)
Power supply cord	2.5m (8.2ft)

419

Standard Equipment : Abrasive Papers 6

*weight according to EPTA-Procedure 01/2003
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-AG