


Makita Versatile 2kg Rotary Hammers



Comparison of Drilling Efficiency

Note: 1. It may differ under some conditions.
2. Numbers in the charts below are relative values when the capacities of Makita "HR2450" are indexed at 100.

Test conditions: Drilled in concrete with compressive strength of 40N/mm².

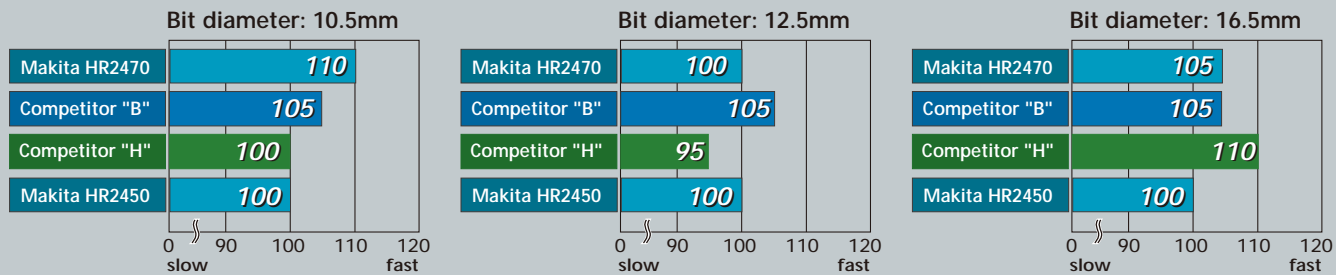

Rotary Hammer HR2230, HR2460/F, HR2470/F/T/FT

Rotary Hammer	HR2230	HR2460/F	HR2470/F	HR2470T/FT
Double Insulation	710W	780W	780W	780W
Variable Speed	710W	780W	780W	780W
Reversing	710W	780W	780W	780W
Torque Limiter	710W	780W	780W	780W
Dust Collecting	710W	780W	780W	780W
Adapted for SDS-PLUS bits	710W	780W	780W	780W
Carrying Case	710W	780W	780W	780W
Built-in Job Light (HR2460F, HR2470F/FT only)	710W	780W	780W	780W
Continuous rating Input	710W	780W	780W	780W
Capacity	65mm (2-9/16")	65mm (2-9/16")	65mm (2-9/16")	65mm (2-9/16")
Concrete : (with diamond core bit)	22mm (7/8")	24mm (15/16")	24mm (15/16")	24mm (15/16")
Concrete : (with T.C.T. bit)	13mm (1/2")	13mm (1/2")	13mm (1/2")	13mm (1/2")
Steel :	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")
Wood :	0-4,050ipm	0-4,500ipm	0-4,500ipm	0-4,500ipm
Impacts per minute	0-1,050rpm	0-1,100rpm	0-1,100rpm	0-1,100rpm
No load speed	357 x 84 x 214mm	362 x 84 x 214mm	370 x 84 x 214mm	394 x 84 x 214mm
Dimensions	14" x 3-5/16" x 8-3/8"	14-1/4" x 3-5/16" x 8-3/8"	14-1/2" x 3-5/16" x 8-3/8"	15-1/2" x 3-5/16" x 8-3/8"
Net weight	2.4kg (5.4lbs)	2.5kg (5.6lbs)	2.6kg (5.9lbs)	2.8kg (6.3lbs)
Power supply cord	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z15211-2 2007-07




Rotary Hammers

HR2230 22mm (7/8") HR2460/F 24mm (7/8")
HR2470/F/T/FT 24mm (7/8") "Combination Hammers"

Satisfy Professional's Needs



Adapted for SDS-PLUS bits

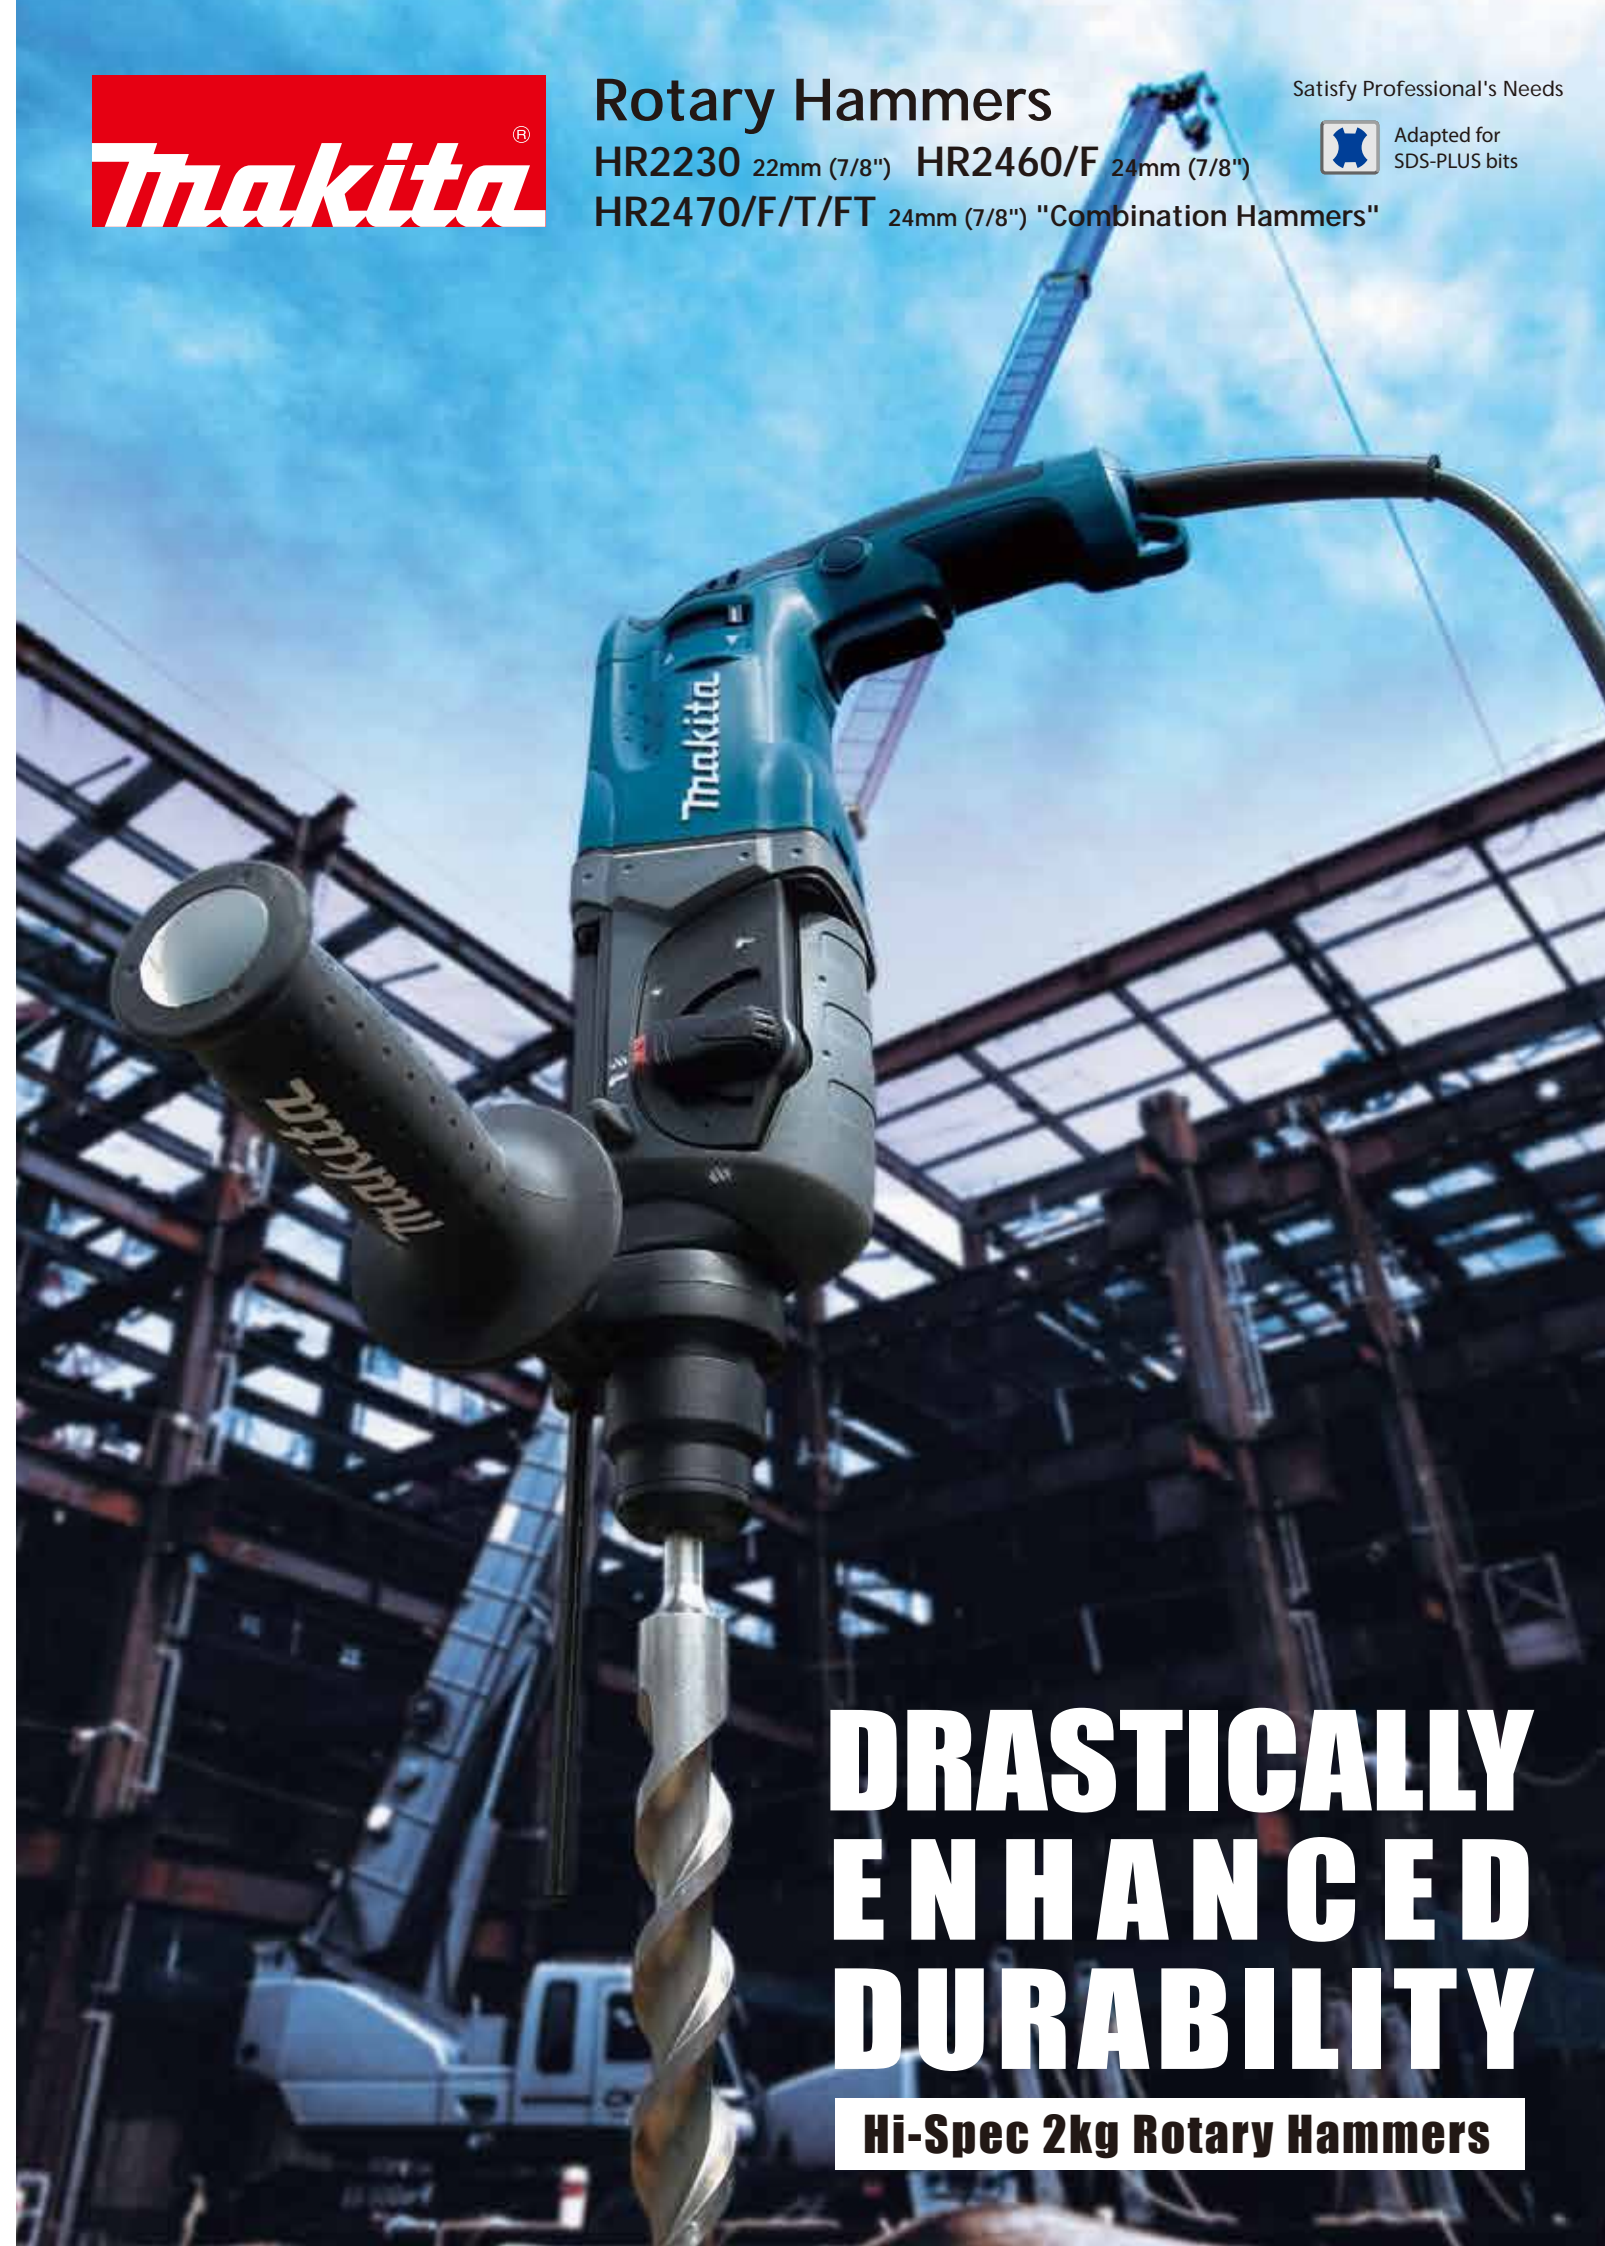

DRASTICALLY ENHANCED DURABILITY

Hi-Spec 2kg Rotary Hammers

High Durability




- Added Durability to Impact Bolt
- Large Seal Ring eliminates grease leakage from matching surface between Inner Housing and Gear Housing.
- Varnish on armature protects from dust and wire-breakage.

Photo : HR2460F


Rotation Reversing System Using Brush Holder Unit

Features the following advantages:


- Protects Carbon Brush from foreign dusts and debris.
- Life of Carbon Brush is 2.7 times long as the existing models.
- Same speed and torque even in reverse rotation
- Saves time and labor for repair thanks to simplified wiring.

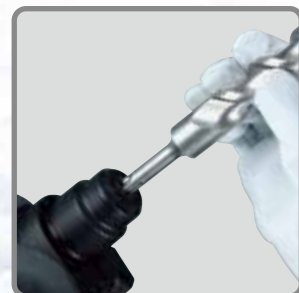

One-Touch Sliding Chuck for Easy Bit Changes



Torque Limiter
:: When drill bit hits against reinforcements, Torque Limiter operates to stop.



No Hammering when Idling
Ensures machine's long life.



1 Lock-On Button
For Continuous Operation
2 Variable Speed



Bumper
Protects the surface of workpiece and machine.

- **Rubberized Grip**
Provides more control and comfort.
- **LED Job Light**
Illuminates the working spot. (HR2460F, HR2470F/FT only)

24mm Combination Hammers

3 MODE

HR2470/ F

780 W 2.6 kg




LED Job Light (HR2470F only)

HR2470T/ FT

780 W 2.8 kg



LED Job Light (HR2470FT only)

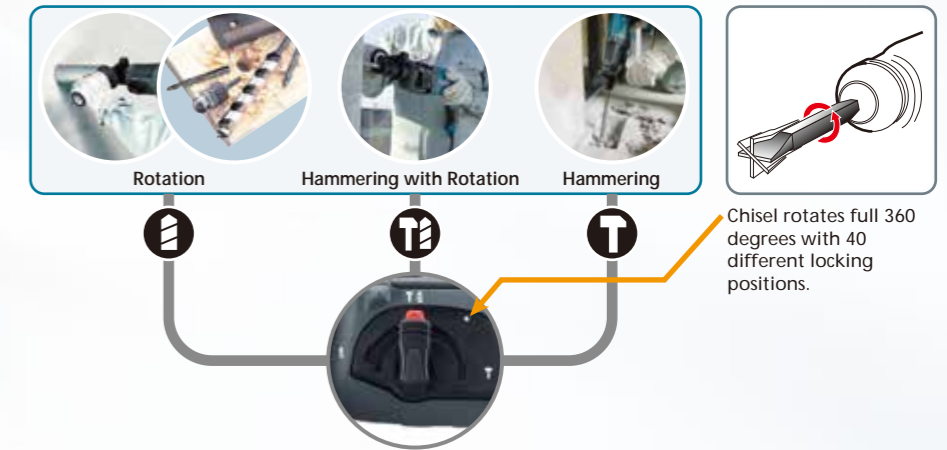

24mm Rotary Hammers

2 MODE

HR2460/ F

780 W 2.5 kg



LED Job Light (HR2460F only)

22mm Rotary Hammer

2 MODE

HR2230

710 W 2.4 kg



Tool does not come with bit.