



Satisfy Professional's Needs


Combination Hammer
HR2475 24mm (15/16")



Adapted for
SDS-PLUS bits


DRASTICALLY ENHANCED DURABILITY

Hi-Spec Combination Hammer

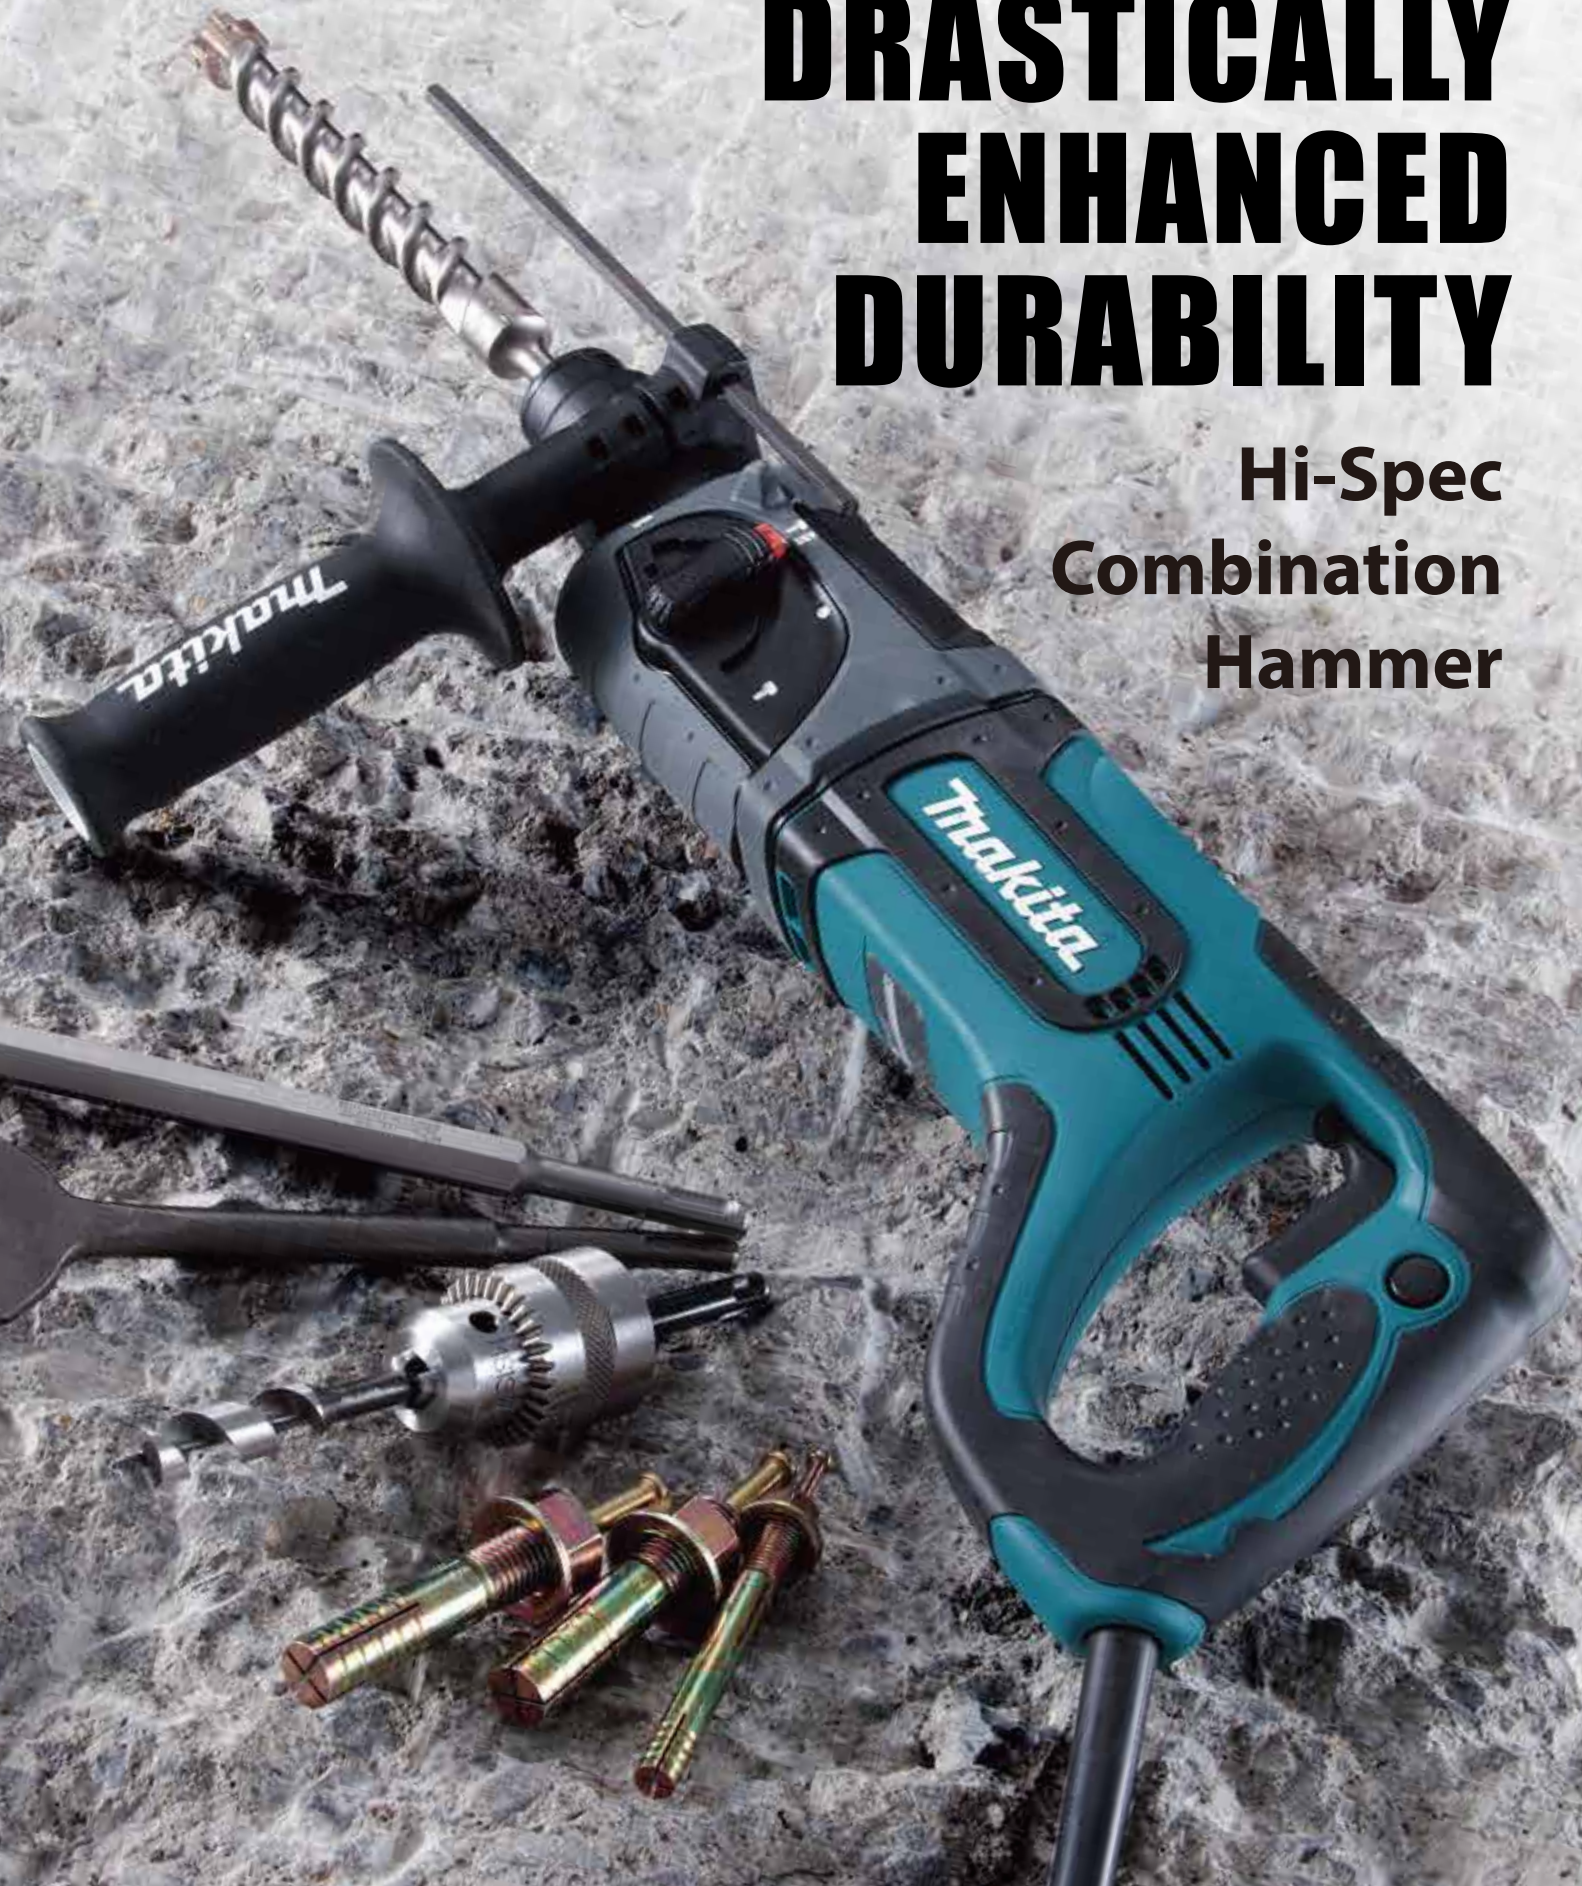

HIGH DURABILITY

- Added durability to impact bolt
- Large seal ring eliminates grease leakage from matching surface between inner housing and gear housing.
- Varnish on armature protects from dust and wire-breakage.

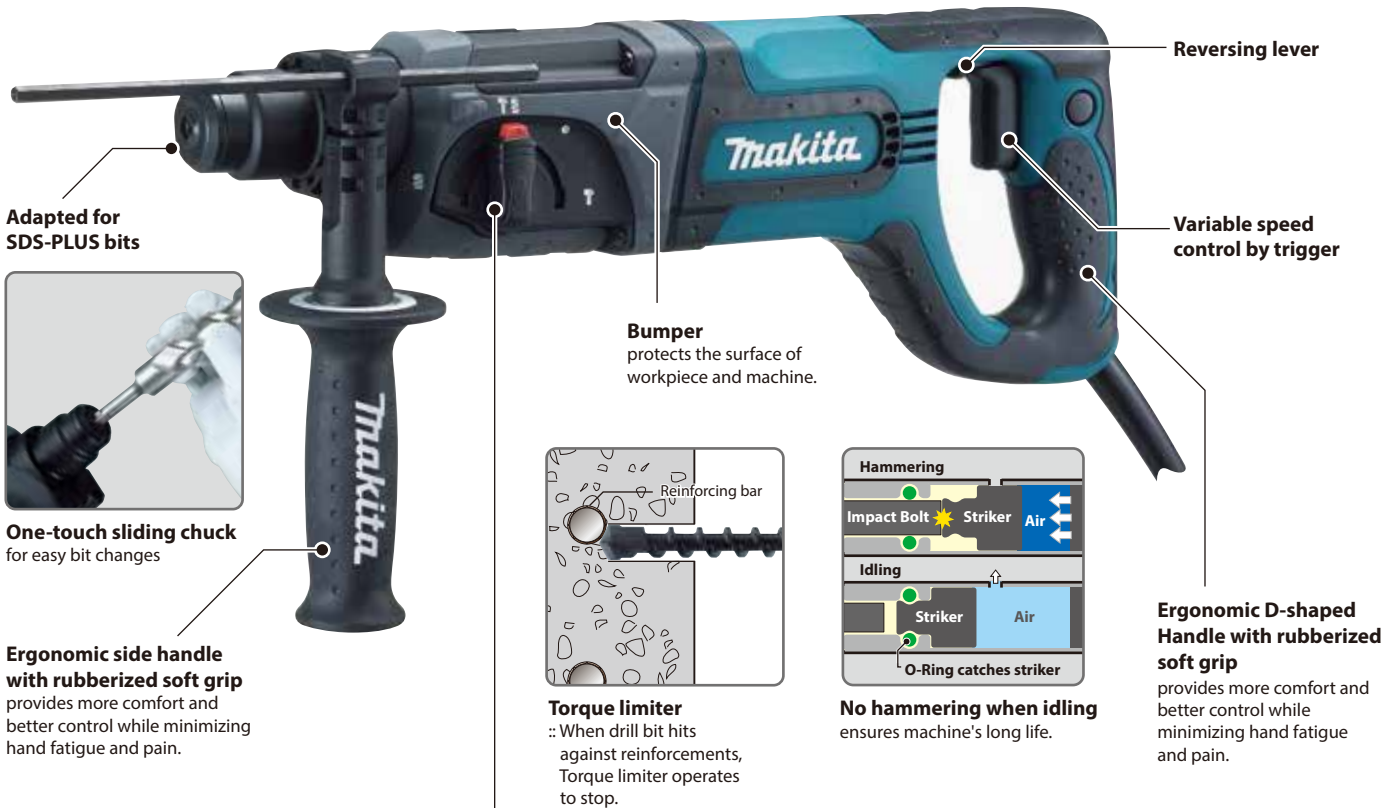

Versatile 3 Mode Operation

Chisel rotates full 360 degrees with 40 different locking positions.

Rotation **Hammering with Rotation** **Hammering**

Accessories

Dust extractor attachment
Part No. 193472-7
Use with Hose 28-1.5
Part No. 192278-0



Waterproof cover
Part No. 421755-8



Dust cup set
Part No. 194580-7
Use with Grip base set
Part No. 194582-3



Drill chuck assembly (13mm)
Part No. 122574-2
Use with Chuck key (Part No.763432-9)



Dust cup
Bit dia 6-14.5mm
Part No. 421342-3
Bit dia 12-16mm
Part No. 421664-1



Keyless drill chuck assembly (13mm)
Part No. 192892-2



Chuck adapter assembly
Part No. D-14093
With screw M6 x 22



(Protects operator from dust and debris)

Combination Hammer

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Dust Collecting
- Adapted for SDS-PLUS bits
- Carrying Case



HR2475 24mm (15/16")

419

Continuous rating Input	780W
Capacity	Concrete : 24mm (15/16") Steel : 13mm (1/2") Wood : 32mm (1-1/4")
Impacts per minute (ipm)	0-4,500
No load speed (rpm)	0-1,100
Dimensions (L x W x H)	429 x 84 x 158mm (16-7/8" x 3-5/16" x 6-1/4")
Net weight*	3.0kg (6.6lbs)
Power supply cord	4.0m (13.1ft)

*weight according to EPTA-Procedure 01/2003

Standard Equipment

Side Handle, Depth Gauge (Tool does not come with bit.)

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23473-2 AJ-BA