




Satisfy Professional's Needs

**Rotary Hammer**  
**HR3530** 35mm (1-3/8")



17mm Hex  
Shank Type

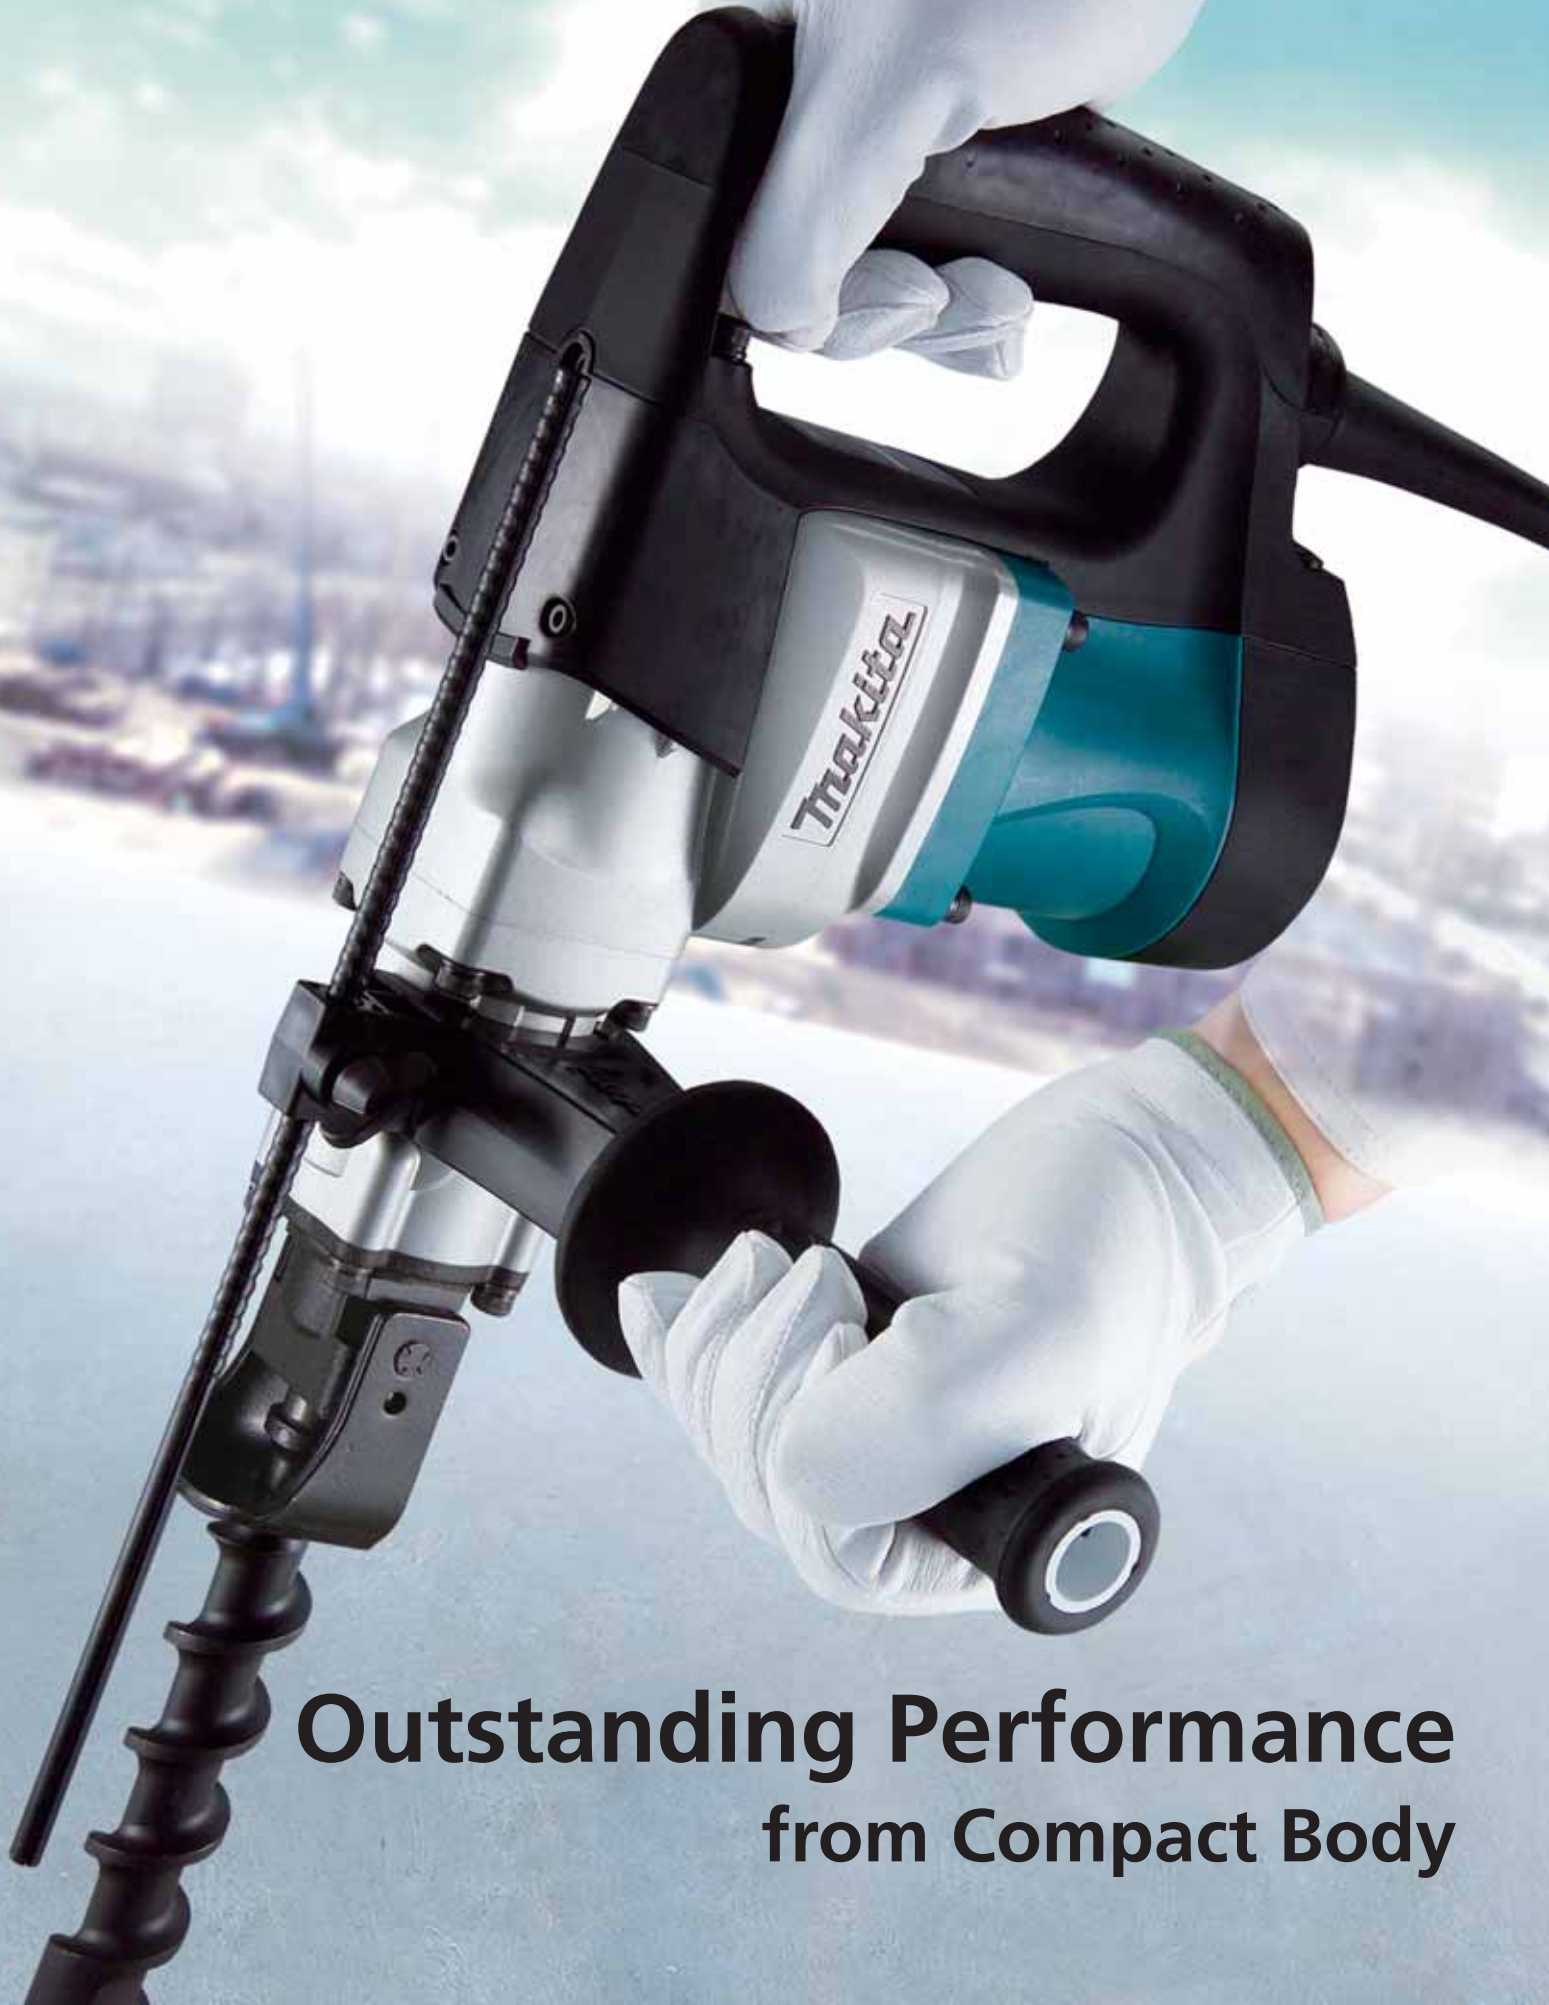

**Outstanding Performance**  
**from Compact Body**




# High Efficiency and Slim Design


**Powerful Impact Energy: 6.2J**  
**Lightweight: 5.3kg (11.7lbs)**

**Compact: 374mm (14-3/4")**


**17mm Hex Shank Type**

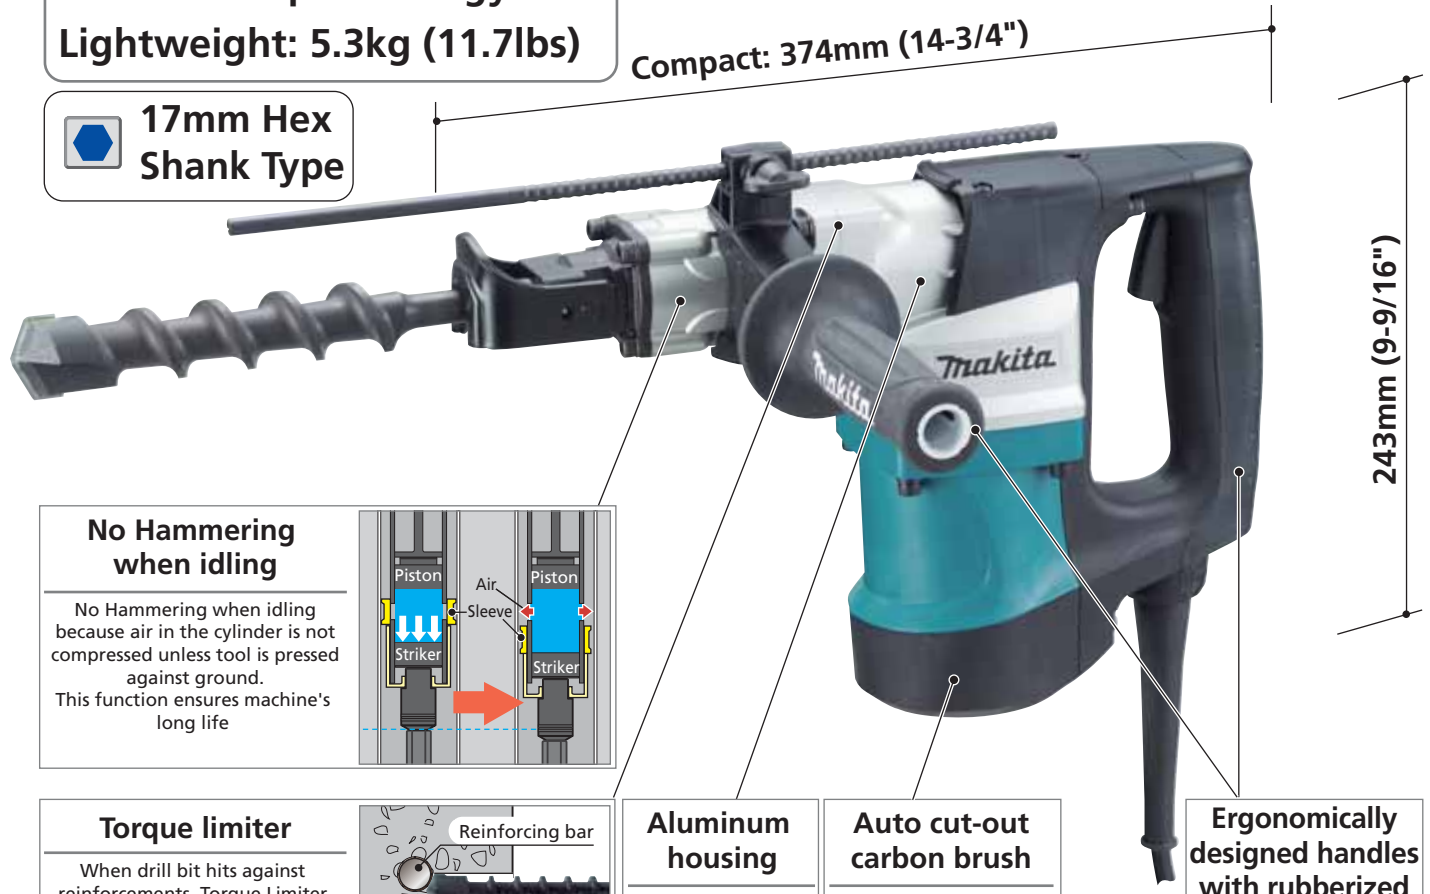

**No Hammering when idling**  
No Hammering when idling because air in the cylinder is not compressed unless tool is pressed against ground. This function ensures machine's long life.



**Torque limiter**  
When drill bit hits against reinforcements, Torque Limiter operates to stop the rotation of drill bit, ensuring safety in your work.



**Aluminum housing**  
Provides high quality and toughness

**Auto cut-out carbon brush**  
When Carbon Brush wears out, it will automatically stop the motor. It protects commutator and indicates time for maintenance.

**Ergonomically designed handles with rubberized soft grip**  
Provide more comfort and control while minimizing hand fatigue and pain.


## Comparison of Drilling / Chipping Efficiency

Note: 1. It may differ under some conditions.  
2. Numbers in the charts below are relative values when the capacities of Competitor "H" are indexed at 100.


Test conditions: Drilled in concrete with compressive strength of 40N/mm<sup>2</sup> to a depth of 40mm.

Test conditions: Chipped concrete with compressive strength of 40N/mm<sup>2</sup>, and measured the amount of concrete removed.


Drilling speed (Bit diameter: 14.5mm)

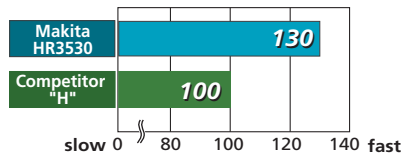

Drilling speed (Bit diameter: 32mm)

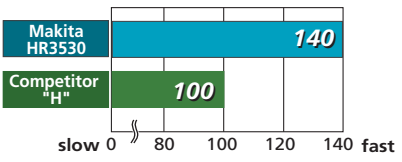

Chipping

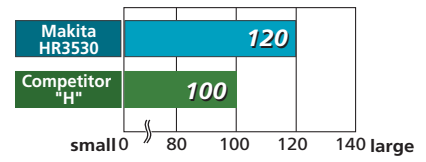

**Rotary Hammer**

- Double Insulation
- Torque Limiter
- 17mm Hex Shank
- Carrying Case

| HR3530 35mm (1-3/8")       | 350  |
|----------------------------|--|
| Continuous rating Input    | 1,010W   |
| Capacity                   |  |
| Concrete (with T.C.T. bit) | 35mm (1-3/8")                                    |
| Concrete (with Core bit)   | 105mm (4-1/8")                                   |
| Impacts per minute (ipm)   | 3,100  |
| No load speed (rpm)        | 760  |
| Dimensions (L x W x H)     | 374 x 100 x 243mm (14-3/4" x 3-15/16" x 9-9/16") |
| Net weight                 | 5.3kg (11.7lbs)                                  |
| Power supply cord          | 5.0m (16.4ft)                                    |

Standard Equipment Side Grip, Depth gauge (Tool does not come with bit.)

Items of standard equipment and specifications may differ by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23336-2 2007-08