



Rotary Hammer  
HR4002 40mm (1-9/16")

Satisfy Professional's Needs



Adapted for  
SDS-MAX bits

**TOP EFFICIENCY  
AND SPEED**



# 2 Mode Rotary Hammer



Adapted for SDS-MAX bits



## :: 2 Mode Change Lever

Hammering with Rotation

Hammering

Chisel locking at 12 different positions



## :: Slide Chuck



Push-in and Go




Slide-back and Pull




## :: No Hammering when Idling

No Hammering while idling because air in the cylinder is not compressed unless tool is pressed against ground. This function ensures machine's long life.



## :: Torque Limiter

When drill bit hits against reinforcements, Torque Limiter operates to stop the rotation of drill bit, ensuring safety in your work.



## :: Rubberized Grip

Provides more comfort and control while minimizing hand fatigue and pain.



## :: Aluminum Housing

Provides high quality and toughness.

## :: Auto Cut-Out Carbon Brush

When Carbon Brush wears out, it will automatically stop the motor. It protects commutator and indicates time for maintenance.


## ■ Comparison of Efficiency

Note: 1. It may differ under some conditions.  
2. Numbers in the charts below are relative values when the capacities of Competitor "B" are indexed at 100.


**1 Test conditions:** Drilled in concrete with compressive strength of 40N/mm<sup>2</sup> to a depth of 40mm.

**2 Test conditions:** Chipped concrete with compressive strength of 40N/mm<sup>2</sup>, and measured the amount of concrete removed.

### 1 Drilling (Bit diameter: 35mm)

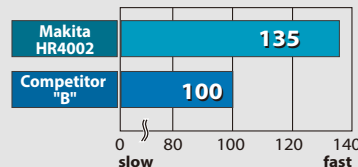

### 2 Chipping

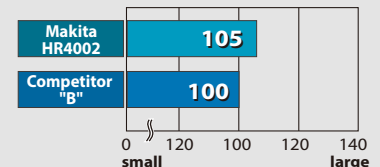

## Rotary Hammer

Double Insulation

Torque Limiter

Carrying Case



## HR4002 40mm (1-9/16")

350

Continuous rating Input	1,050W (10A: North America)
Max. bit dia.	40mm (1-9/16")
Max. core bit dia.	105mm (4-1/8")
Blows per minute	2,500bpm
No load speed	680rpm
Dimensions (L x W x H)	458mm x 114mm x 256mm (18" x 4-1/2" x 10-1/8")
Net weight	6.2kg (13.7lbs)
Power supply cord	5.0m (16.4ft)

### Standard Equipment

Depth Gauge, Grip Assembly, Grease Vessel (Tool does not come with bit)

Items of standard equipment and specifications may differ by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23315-2 2007-04