



Adapted for SDS-MAX bits

Torque limiter

Easy-to-operate operation mode change lever

- The mode lock lever of the current HR4011C series is eliminated for easier mode change.
- Located on the top of the motor housing for reduced possibility of breakage even if the machine is carelessly laid.

One touch sliding chuck for easy bit changes

Soft grip provides more comfort and control.

LED power light that indicates trouble with the electric circuit

LED service light that indicates when to replace carbon brush

Variable speed control by dial

Electronic with:
Constant speed control
Soft start for reducing start-up torque

Photo: HR4013C



Photo: HR4013C


Accessories

Dust Extractor Attachment Set

The dust extractor attachment can be attached without replacing the side handle.

Part No. 196536-6

Drilling mode



Hammering mode



Dust Extractor Attachment Set

Hammering only

Connected with vacuum cleaner, this attachment is able to extract fine dust particles at very high dust extraction rate to provide cleaner work environment.

Part No. 196571-4



Rotary Hammer

HR4013C / HR4003C 40mm (1-9/16") Adapted for SDS-MAX bits **350**

- Double Insulation
- Variable Speed
- Adapted for SDS-MAX bits
- Torque Limiter
- Constant Speed
- Soft Start
- Carrying Case

| | HR4013C | AVT & SOFT NO LOAD | HR4003C |
|---|---|--------------------|---|
| Continuous rating Input Capacity | 1,100W | | 1,100W |
| | Concrete (with T.C.T. bit) : 40mm (1-9/16") | | Concrete (with T.C.T. bit) : 40mm (1-9/16") |
| | Concrete (with Core bit) : 105mm (4-1/8") | | Concrete (with Core bit) : 105mm (4-1/8") |
| Impacts per minute (ipm) | 1,450 - 2,900 | | 1,450 - 2,900 |
| No load speed (rpm) | 250-500 | | 250-500 |
| Dimensions (L x W x H) | 479x112x263mm (18-11/16"x4-3/8"x10-3/8") | | 479x106x263mm (18-11/16"x4-3/16"x10-3/8") |
| Net Weight* | 6.8kg (15.1lbs) | | 6.2kg (13.8lbs) |
| Power supply cord | 5.0m (16.4ft) | | 5.0m (16.4ft) |

Standard Equipment : Depth Gauge, Side Handle, Bit Grease (Tool does not come with bit.)

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BD-AJ



Rotary Hammer 40mm (1-9/16")
HR4013C / HR4003C

Satisfy Professional's Needs



Adapted for SDS-MAX bits

ADVANCED
Vibration Control



AVT & SOFT NO LOAD
ANTI VIBRATION TECHNOLOGY

Extra Comfort with unrivalled low level of vibration

Photo : HR4013C (Tool does not come with bit.)

AVT

ANTI VIBRATION TECHNOLOGY

Comparison of Vibration level* and Time to reach ELV (Exposure Limit of Vibration)**


| | | |
|-------------------|---------------------|---------|
| HR4013C | 5.0m/s ² | 480min. |
| Predecessor Model | 7.5m/s ² | 213min. |
| Competitor "B" | 10m/s ² | 120min. |

*It is known as the tri-axial value and value at Directive of A(8).
**It means the maximum amount of vibration that an operator may be exposed to on any single day.

Unrivalled low level of vibration


Vibration absorbing housing (HR4013C)

This is the new AVT mechanism advanced from the current "Vibration absorbing handle". The level of vibration is further reduced by completely separating the machine holding section from the motor/transmission section

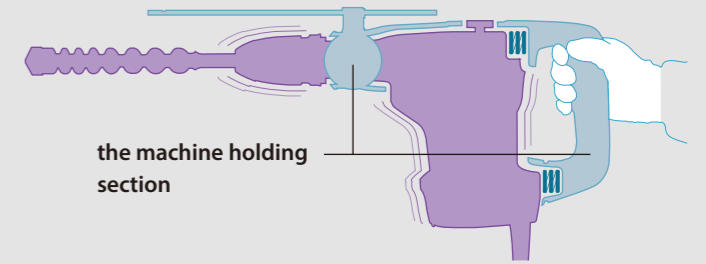

Active dynamic vibration absorber (HR4013C)

ensures operation with extremely low vibration. allows tool design with flat body sides for better handling.

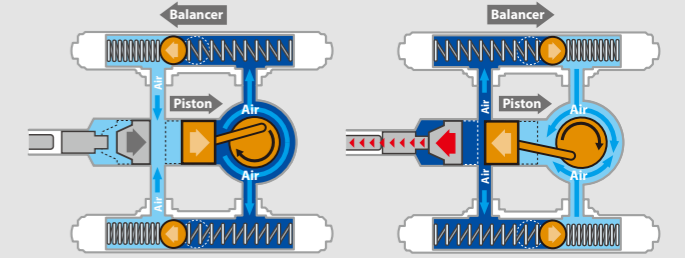

Damper spring

absorbs reaction force caused by drill bit at the moment of impact.

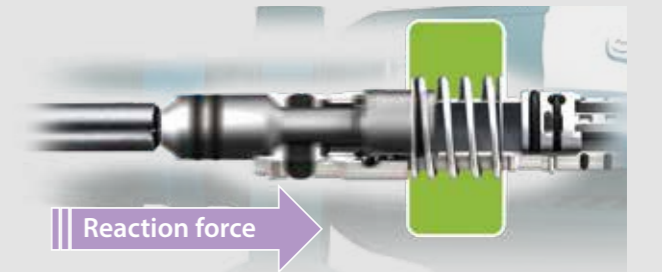


Photo : HR4013C (Tool does not come with bit.)



Adapted for SDS-MAX bits


High performance

Drilling efficiency **20% higher** with 32mm diameter bit
Chipping efficiency **45% higher** with bull point

Compared with our predecessor model



Lock-on in hammering mode

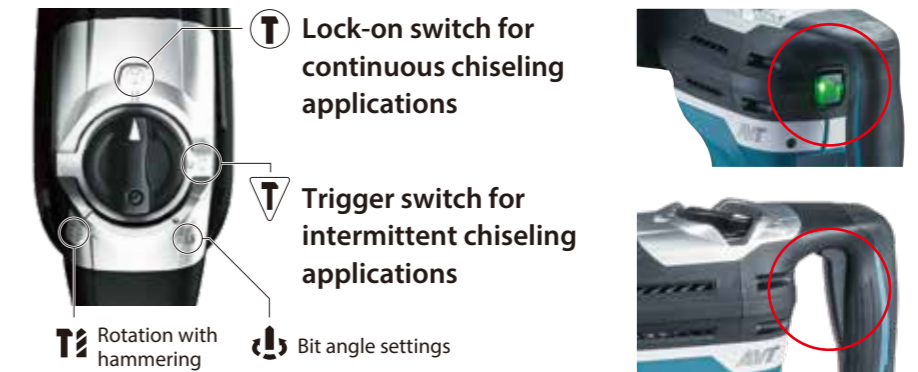

Soft no load" function (HR4013C)

- reduces vibration of tool body when idling, accordingly decreases the amount of vibration to operator's hands during a day's operation.

- minimizes deflection of bit tip from aiming point when starting chipping.

SOFT NO LOAD

