




# Rotary Hammer HR4030C 40mm (1-9/16")

Satisfy Professional's Needs

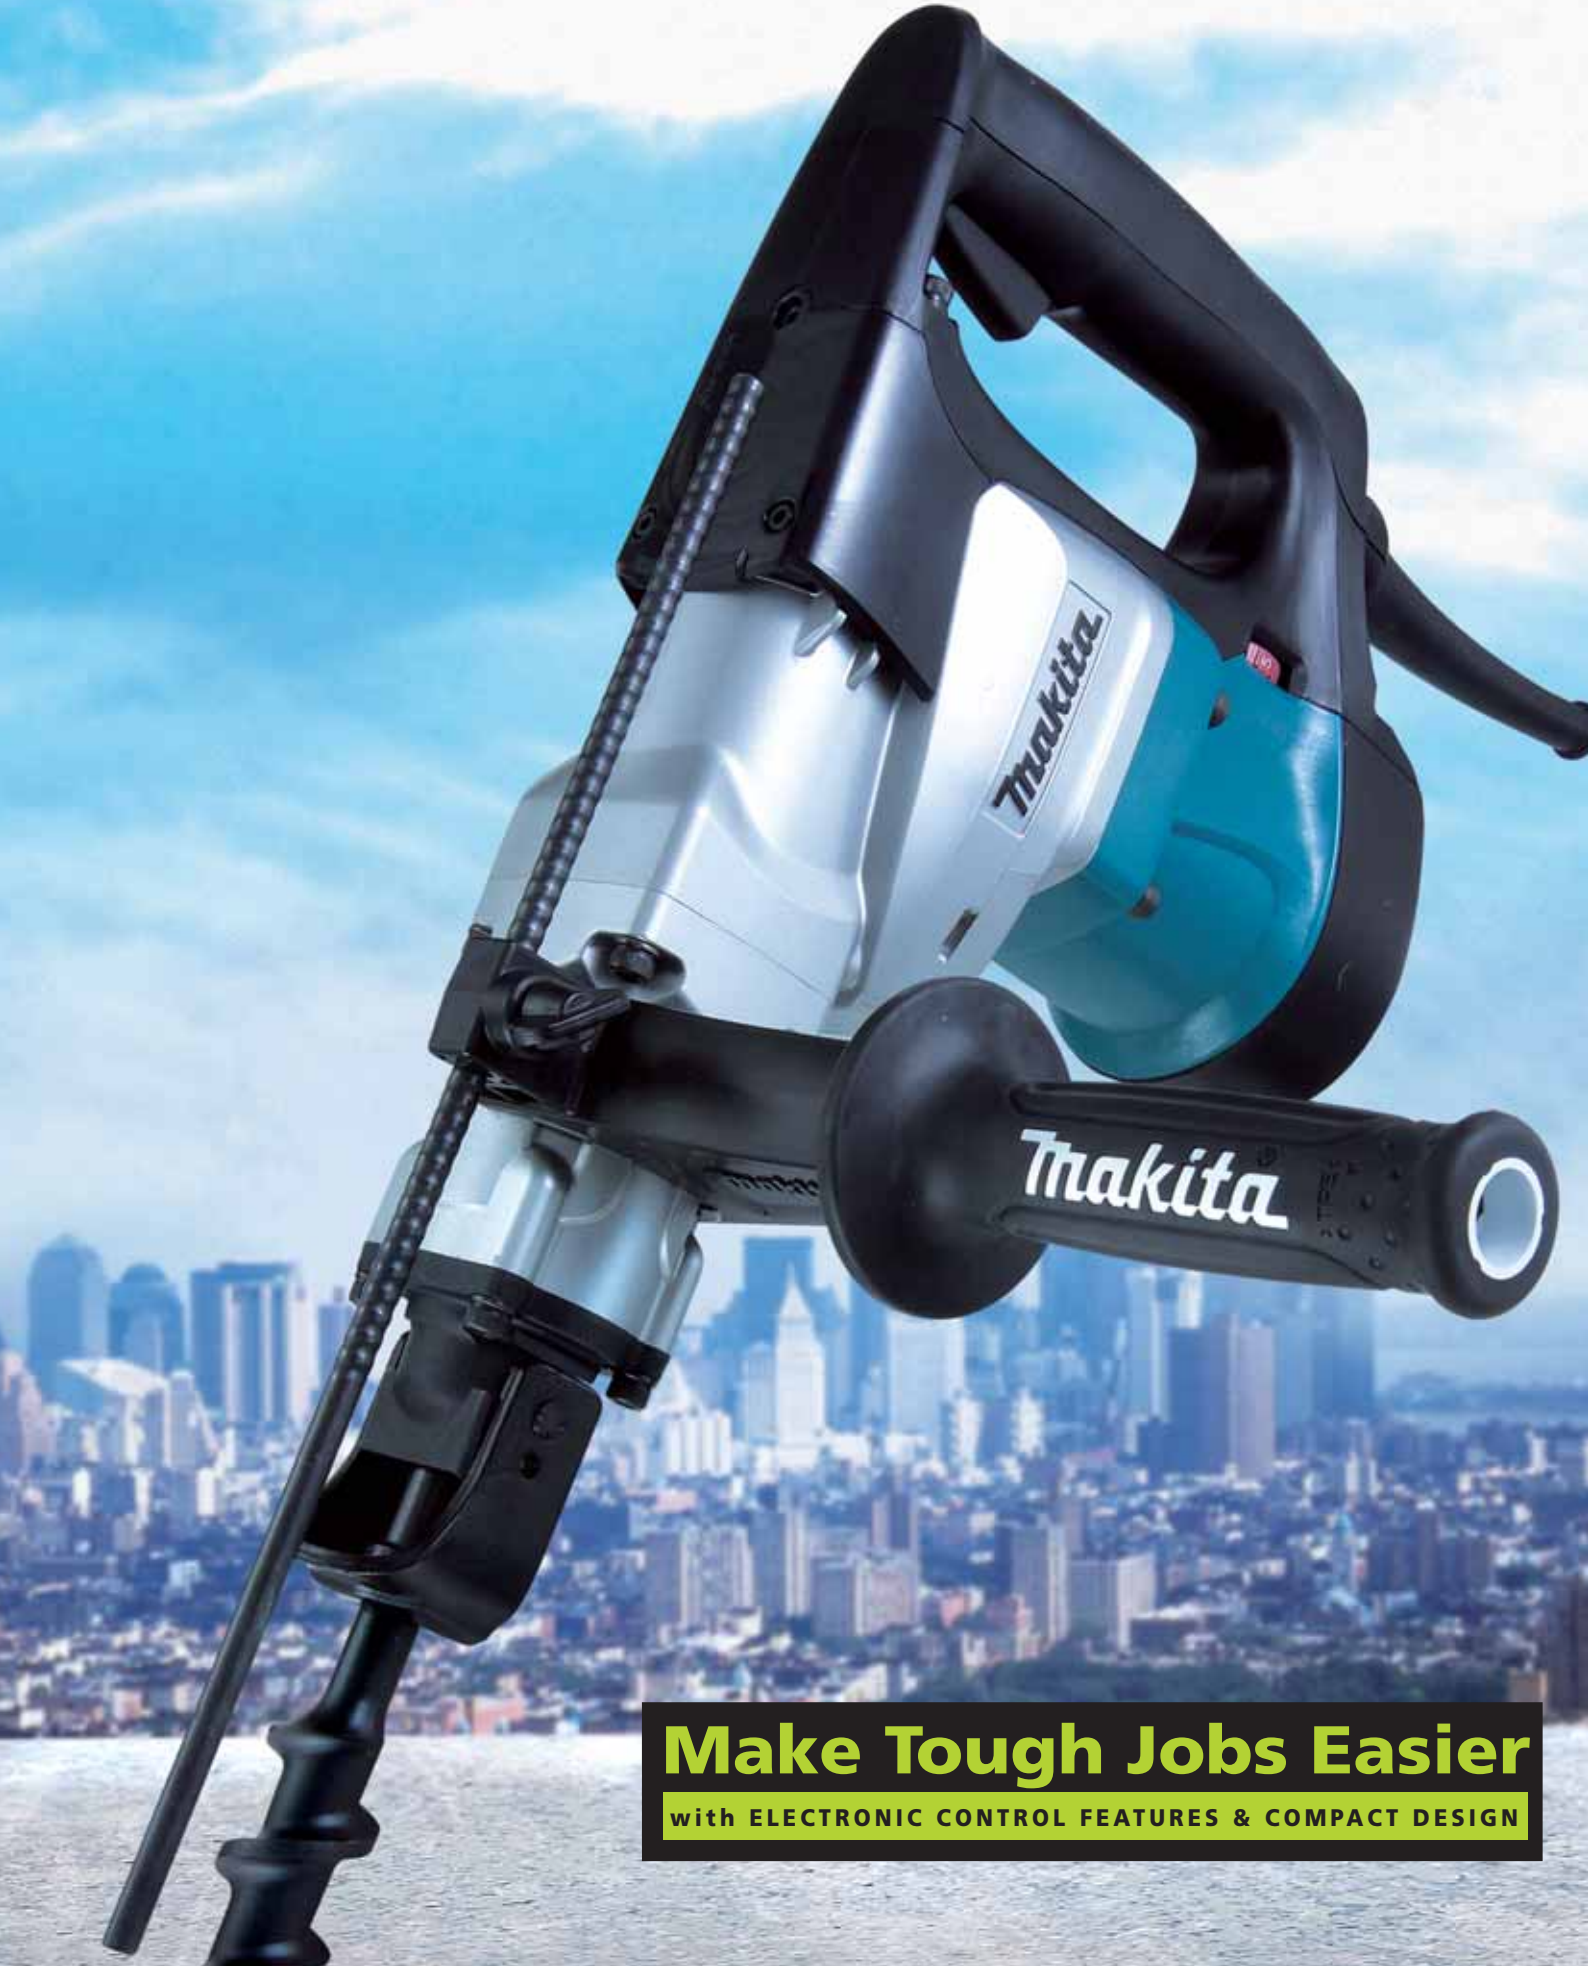

**Make Tough Jobs Easier**  
with ELECTRONIC CONTROL FEATURES & COMPACT DESIGN



# High Efficiency with Electronic Control Features

(Electronic speed control, Variable speed, Soft start)


**Powerful Impact Energy: 9.2J**

**Lightweight: 6.2kg (13.7lbs)**

**Compact: 413mm (16-1/4")**




**17mm Hex Shank Type**

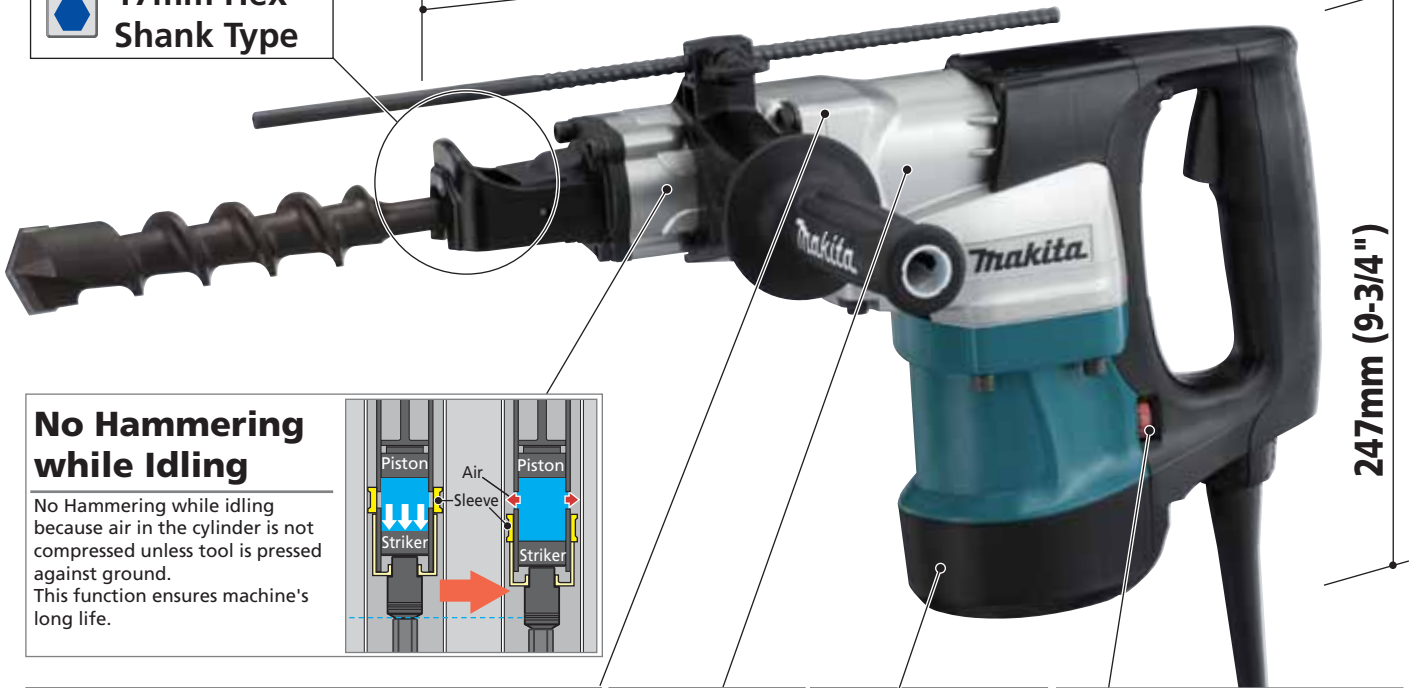


## No Hammering while Idling

No Hammering while idling because air in the cylinder is not compressed unless tool is pressed against ground. This function ensures machine's long life.



## Torque Limiter

When drill bit hits against reinforcements, Torque Limiter operates to stop the rotation of drill bit, ensuring safety in your work.



## Aluminum Housing

Provides high quality and toughness

## Auto Cut-Out Carbon Brush

When Carbon Brush wears out, it will automatically stop the motor. It protects commutator and indicates time for maintenance.

## Dial for Electronic Speed Control

Electronic variable speed control dial enables to select speed to job.




## Comparison of Efficiency

Note: 1. It may differ under some conditions.  
2. Numbers in the charts below are relative values when the capacities of Competitor "H" are indexed at 100.


Test conditions: Drilled in concrete with compressive strength of 40N/mm<sup>2</sup> to a depth of 40mm.

Test conditions: Chipped concrete with compressive strength of 35N/mm<sup>2</sup>, and measured the amount of concrete removed.

Drilling speed (Bit diameter: 32mm)

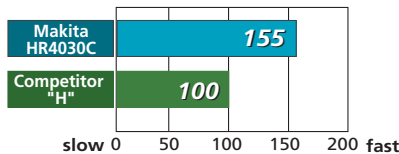

Chipping

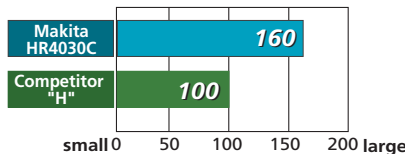

## Rotary Hammer

- Double Insulation
- Electronic Speed Control
- Variable Speed
- Torque Limiter
- Soft Start
- Carrying Case



## HR4030C 40mm (1-9/16")

350

Continuous rating Input	1,100W
Max. bit dia.	40mm (1-9/16")
Max. core bit dia.	118mm (4-5/8")
Blows per minute	1,300 - 2,600bpm
No load speed	230 - 460rpm
Dimensions (L x W x H)	413mm x 107mm x 247mm (16-1/4" x 4-1/4" x 9-3/4")
Net weight	6.2 kg (13.7lbs)
Power supply cord	5m (16.4ft)

### Standard Equipment

Depth Gauge, Grip Assembly (Tool does not come with bit)

Standard equipment and specifications may differ by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23290-2 2007-01