



# Engine Pump

EW2050H, EW2051H 50mm (2")

EW3050H, EW3051H 76mm (3")

## With oil level sensor to protect the engine.

### Complying with strict emission regulations; EPA Phase 3 and EU stage 3.

#### Clear water pump

EW2050H 50mm(2")

EW3050H 76mm(3")

#### Semi-trash pump


EW2051H 50mm(2")

EW3051H 76mm(3")

The impeller and the sealing parts are more abrasion resistant than those of clean water pumps.



Photo: EW2050H

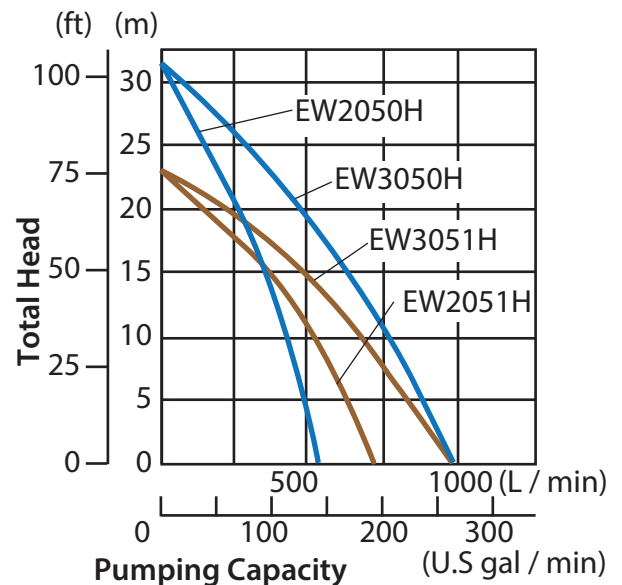

Engine Pump	EW2050H 50mm (2") Suction / Discharge EW3050H 76mm (3") Suction / Discharge		EW2051H 50mm (2") Suction / Discharge EW3051H 76mm (3") Suction / Discharge	
	Clear water pump		Semi-trash pump	
• with oil level sensor				
Engine type	EW2050H EX16	EW3050H EX17	EW2051H EX16	EW3051H EX17
Displacement	169mL	169mL	169mL	169mL
Spark plug	NGK BR6HS	NGK BR6HS	NGK BR6HS	NGK BR6H
Suction & Discharge diameter	50mm (2")	76mm (3")	50mm (2")	76mm (3")
Max. pumping capacity	520 L / min (17,600 oz/min)	1000 L / min (33,800 oz/min)	700 L / min (23,700 oz/min)	1000 L / min (33,800 oz/min)
Total head	32m (105ft)	32m (105ft)	23m (75ft)	23m (75ft)
Suction head	8.0m (26ft)	8.0m (26ft)	8.0m (26ft)	8.0m (26ft)
Fuel tank	3.2L	3.2L	3.2L	3.2L
Dimensions (L x W x H)	527x368x417mm (20-3/4"x14-1/2"x16-3/8")	527x368x417mm (20-3/4"x14-1/2"x16-3/8")	527x368x417mm (20-3/4"x14-1/2"x16-3/8")	527x368x417mm (20-3/4"x14-1/2"x16-3/8")
Net weight*	24.9kg (54.9lbs)	26.1kg (57.6lbs)	24.9kg (54.9lbs)	26.1kg (57.6lbs)
<b>Standard Equipment:</b> Hose coupling x2, Hose band x3, Strainer, Engine tool kit				

\*weight according to EPTA-Procedure 01/2003 *Items of standard equipment and specifications may vary by country or area.*

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BF-AG