


Optional Accessories

Router

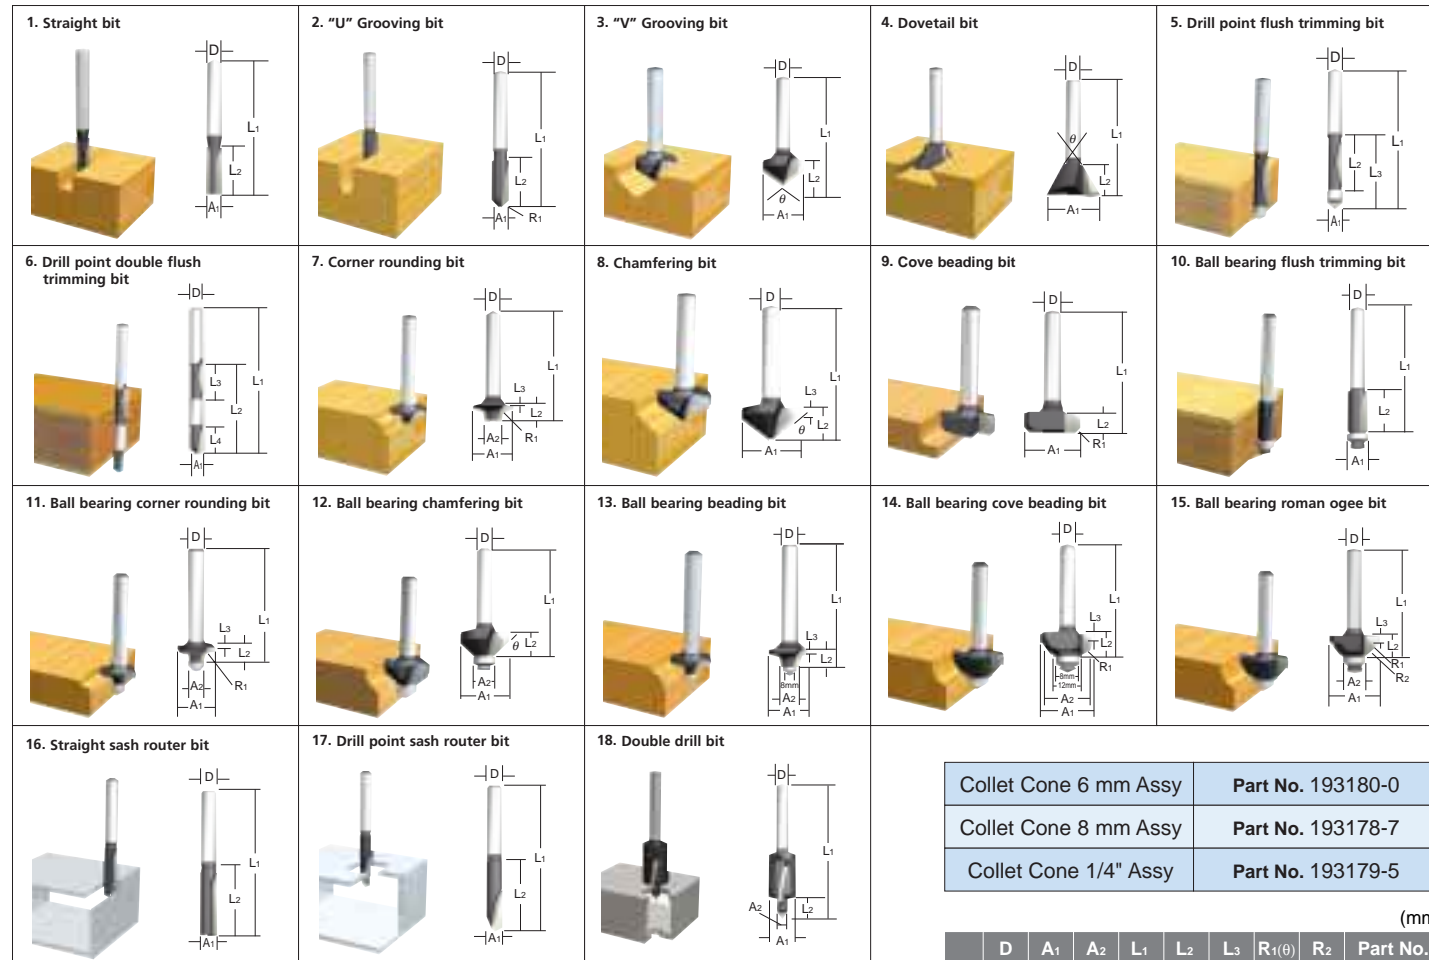

Collet Cone 6 mm Assy	Part No. 193180-0
Collet Cone 8 mm Assy	Part No. 193178-7
Collet Cone 1/4" Assy	Part No. 193179-5

	D	A ₁	L ₁	L ₂	L ₃	R ₁ (θ)	Part No.
1	6	20	50	15	—	—	793143-2
	1/4"	20	50	15	—	—	793160-2
	8	8	60	25	—	—	793126-2
	6	8	50	18	—	—	793077-9
	1/4"	8	50	18	—	—	793103-4
	6	6	50	18	—	—	793076-1
2	1/4"	6	50	18	—	—	793074-5
	6	6	50	18	—	3	793328-0
	1/4"	6	50	18	—	3	793329-8
3	6	20	50	15	—	(90°)	793193-7
	1/4"	20	50	15	—	(90°)	793194-5
	8	12	50	9	—	(30°)	793066-4
4	1/4"	12	50	9	—	(30°)	793372-7
	8	14.5	55	10	—	(35°)	793095-7
	1/4"	14.5	55	10	—	(35°)	793373-5
	8	14.5	55	14.5	—	(23°)	793094-9
5	1/4"	14.5	55	14.5	—	(23°)	793374-3
	8	8	60	20	35	—	793063-0
	6	6	60	18	28	—	793078-7
1/4"	6	60	18	28	—	793108-4	

	D	A ₁	A ₂	L ₁	L ₂	L ₃	L ₄ (C)	R ₁ (θ)	Part No.
6	8	8	—	80	55	20	25	—	793061-4
	6	6	—	70	40	12	14	—	793091-5
	1/4"	6	—	70	40	12	14	—	793111-5
7	6	25	9	48	13	5	—	8	793142-4
	1/4"	25	9	48	13	5	—	8	793159-7
	6	20	8	45	10	4	—	4	793081-8
8	1/4"	20	8	45	10	4	—	4	793105-0
	6	23	—	46	11	6	—	(30°)	793144-0
	1/4"	23	—	46	11	6	—	(30°)	793161-0
9	6	20	—	50	13	5	—	(45°)	793080-0
	1/4"	20	—	50	13	5	—	(45°)	793075-3
	6	20	—	49	14	2	—	(60°)	793145-8
10	1/4"	20	—	49	14	2	—	(60°)	793162-8
	6	20	—	43	8	—	—	4	793146-6
	1/4"	20	—	43	8	—	—	4	793163-6
11	6	25	—	48	13	—	—	8	793147-4
	1/4"	25	—	48	13	—	—	8	793164-4
	6	10	—	50	20	—	—	—	793148-2
12	1/4"	10	—	50	20	—	—	—	793165-2
	6	15	8	37	7	3.5	—	3	793151-3
	1/4"	15	8	37	7	3.5	—	3	793168-6
13	6	21	8	40	10	3.5	—	6	793152-1
	1/4"	21	8	40	10	3.5	—	6	793169-4

(mm)

	D	A ₁	A ₂	L ₁	L ₂	L ₃	R ₁ (θ)	R ₂	Part No.
12	6	26	8	42	12	—	(45°)	—	793149-0
	1/4"	26	8	42	12	—	(45°)	—	793166-0
	6	20	8	41	11	—	(60°)	—	793150-5
13	1/4"	20	8	41	11	—	(60°)	—	793167-8
	6	20	12	40	10	5.5	4	—	793153-9
	1/4"	20	12	40	10	5.5	4	—	793170-9
14	6	26	12	42	12	4.5	7	—	793154-7
	1/4"	26	12	42	12	4.5	7	—	793171-7
	6	20	18	40	10	5.5	3	—	793157-1
15	1/4"	20	18	40	10	5.5	3	—	793174-1
	6	26	22	42	12	5	5	—	793158-9
	1/4"	26	22	42	12	5	5	—	793175-9
16	6	20	8	40	10	4.5	2.5	4.5	793155-5
	1/4"	20	8	40	10	4.5	2.5	4.5	793172-5
	6	26	8	42	12	4.5	3	6	793156-3
17	1/4"	26	8	42	12	4.5	3	6	793173-3
	6	8	—	65	30	—	—	—	793090-7
	1/4"	8	—	65	30	—	—	—	793120-4
18	6	6.5	—	60	15	—	—	—	793089-2
	1/4"	6.5	—	60	15	—	—	—	793119-9
	6	8	—	65	18	—	—	—	793087-6
19	1/4"	8	—	65	18	—	—	—	793112-3
	6	6	—	65	18	—	—	—	793086-8
	1/4"	6	—	65	18	—	—	—	793092-3
20	6	18	6.5	60	12	—	—	—	793085-0
	1/4"	18	6.5	60	12	—	—	—	793115-7
	6	16	6.5	60	12	—	—	—	793084-2
21	1/4"	16	6.5	60	12	—	—	—	793116-5
	6	14	6.5	60	12	—	—	—	793083-4
	1/4"	14	6.5	60	12	—	—	—	793117-3
22	6	12	6.5	60	12	—	—	—	793082-6
	1/4"	12	6.5	60	12	—	—	—	793118-1



Double Insulation

Router (Plunge type)

Model RP1110C (with electronic controller)

Model RP0910 (without electronic controller)

MAKITA's first 1000W Class 8mm Plunge Routers For Professionals.



Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z14281-2 2000-2

NEW

Photo: Model RP1110C



Powerful but Compact Routers assure the superior maneuverability.

Compact Design

Designed extremely compact to make finer work easier.



Photo: Model RP0910

- Powerful 900 watts (RP0910) and 1100 watts (RP1100C) motor delivers 27,000 rpm for smooth routing!
- Compact design!
- Fine bit depth adjustment for precise routing!
- Ergonomic soft grip for comfortable operation!
- Shaft lock requires one wrench to change bit!
- Electronic speed controller for constant speed under load. (RP1100C)
- Speed control dial for selecting the best speed for work piece. (RP1100C)
- Soft start feature for smoother start-ups. (RP1100C)
- RP0910 and RP1100C are designed to accept all Elu's accessories.

1. Dust Nozzle



Dust collector can be connected to both upper part and lower part of motor housing.

2. Fine Height Adjustment



Routing depth can be adjusted by 1 mm. (1 turn = 1 mm)

3. Rigid Aluminum Bracket



Rigid Aluminum Bracket for optimum precision and routing quality.



4. Speed control dial (Model RP1100C)



Speed control dial for the ideal speed for workpiece

5. Soft Grip



Ergonomic soft-pad grips fit your hand comfortably and prevent from slipping.

6. Shaft Lock

With shaft lock feature, you need only one wrench to change the bit quickly and easily.

7. Endurable Cord Guard

New Cord Guard with higher flexibility to protect cord against rugged use.

8. Lock On-Off Switch

9. 8 mm Collet

SPECIFICATIONS

Double Insulation

Variable Speed (for Model RP1100C)

Electronic Speed Control (for Model RP1100C)

Soft Start (for Model RP1100C)

Dust Collecting

RP1100C / RP0910

Collet capacity	8 mm, 6 mm (1/4")
Continuous rating	1,100 W (RP1100C)
Input	900 W (RP0910)
No load speed	8,000 - 24,000 min ⁻¹ (rpm) (RP1100C)
	27,000 min ⁻¹ (rpm) (RP0910)
Plunge capacity	0 - 57 mm (2-1/4")
Overall height	260 mm (10-1/4")
Net weight	3.4 kg (7.5 lbs) (RP1100C)
	3.3 kg (7.2 lbs) (RP0910)
Power supply cord	4 m (13.1 ft.)

Standard equipment

Templet Guide 12
Part No. 344904-9

Straight Guide
Part No. 164834-6

Collet Cone 8mm Assy

Nozzle
Part No. 122609-9

Dust Nozzle
Part No. 122615-4

Wrench 17
Part No. 781008-0

Wrench 8
Part No. 781213-9

Standard equipment may differ from country to country

Photo: Model RP1100C