



Circular Saw
5008MG / 5008MGA 210mm (8-1/4")

MAGNESIUM

Very Deep Cut
 Max. cutting depth of
75.5mm (3")



Photo : 5008MGA




Comparison of Cutting Efficiency

Note: 1. It may differ under some conditions.


2. Numbers in the charts below are relative values when the capacities of Makita Model 5008B are indexed at 100.

Blade used for tests: 210mm (8-1/4") saw blade supplied with each model*

Test material: 2x10" (38x230mm) SPF timber
 Bevel angle: 0 degree

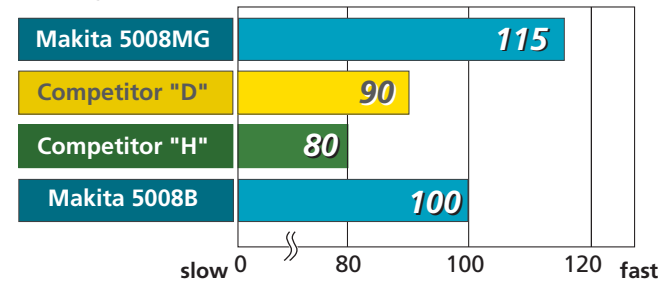

Test material: 60x300mm Douglas fir
 Bevel angle: 0 degree

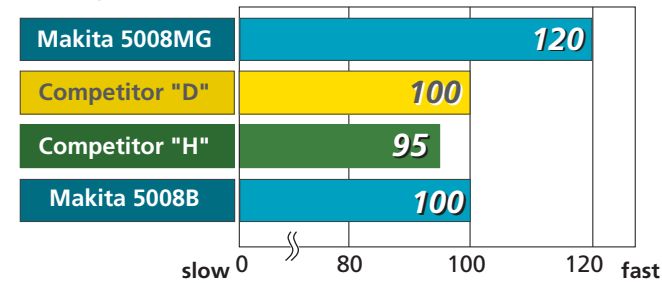

*The number of the teeth of the saw blade: 24T=Makita 5008MG, Competitor D 20T=Makita 5008B, Competitor H

Circular Saw

- Double insulation
- Electric Brake (5008MGA only)
- Built-in Job Light



5008MG / 5008MGA 210mm (8-1/4") 153

Continuous rating Input Capacity	1,800W at 90 degrees : 75.5mm (3") at 45 degrees : 57mm (2-1/4")
Blade diameter	210mm (8-1/4")
No load speed (rpm)	5,200
Dimensions	332 x 243 x 277mm (13-1/8" x 9-9/16" x 10-7/8")
Net weight	4.8kg (10.6lbs)
Power supply cord	2.5m (8.2ft)

Standard Equipment TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23334-2 2007-09

Less weight yet with high rigidity

Photo: 5008MG




Lightweight at only 4.8kg (10.6lbs)

Tool weight has been reduced by using magnesium diecast for base and blade case.



Max. cutting depth
75.5mm
(3")

Largest cutting capacity in its class.

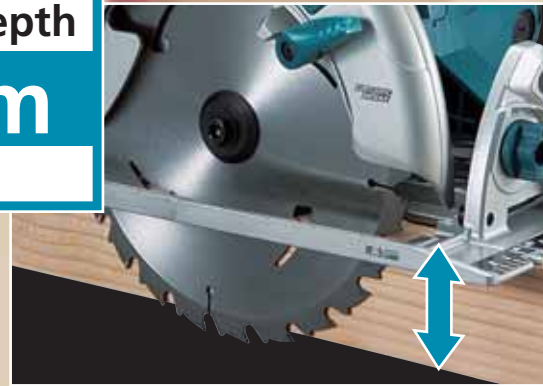

Powerful 1,800W motor



Flat rear end of motor housing is convenient for replacing the saw blade.

Blower function



The air directed from the end of the top guide blows sawdust off the cut line ahead.

Calibrated for accurate cut of depth adjustment



Easy-to-read depth scales



Max. bevel capacity
50degrees
cutting depth: 51.5mm (2")

Comfortable replacing of the saw blade

Screw can be loosened or tightened, by either hex wrench or hex socket wrench.



Hex wrench holder

Best-fitting rubberized soft grip
Non-skid with elastomer

Rubberized levers feature metal and rubber construction, and are operable even if the rubber breaks off.



Positive stops
22.5, 45, 50
degrees

Bevel adjustment with positive stops at 22.5, 45, 50 degrees.



Built-in
Twin LED light

for easy cutting of workpiece in the dark place

Brightly illuminates the blade and cut line for easy cutting of workpiece in the dark place.



Dust Nozzle

is attachable for connecting to vacuum cleaner. (Standard equipment for European countries)

Magnesium diecast

Safety cover designed to move smoothly.

5008MG / 5008MGA 210mm (8-1/2") Circular Saw

Photo: 5008MG