




Satisfy Professional's Needs

Table Top Miter Saw  
LH1200FL 305mm (12")

# Miter Saw

Max. cutting width up to 200mm

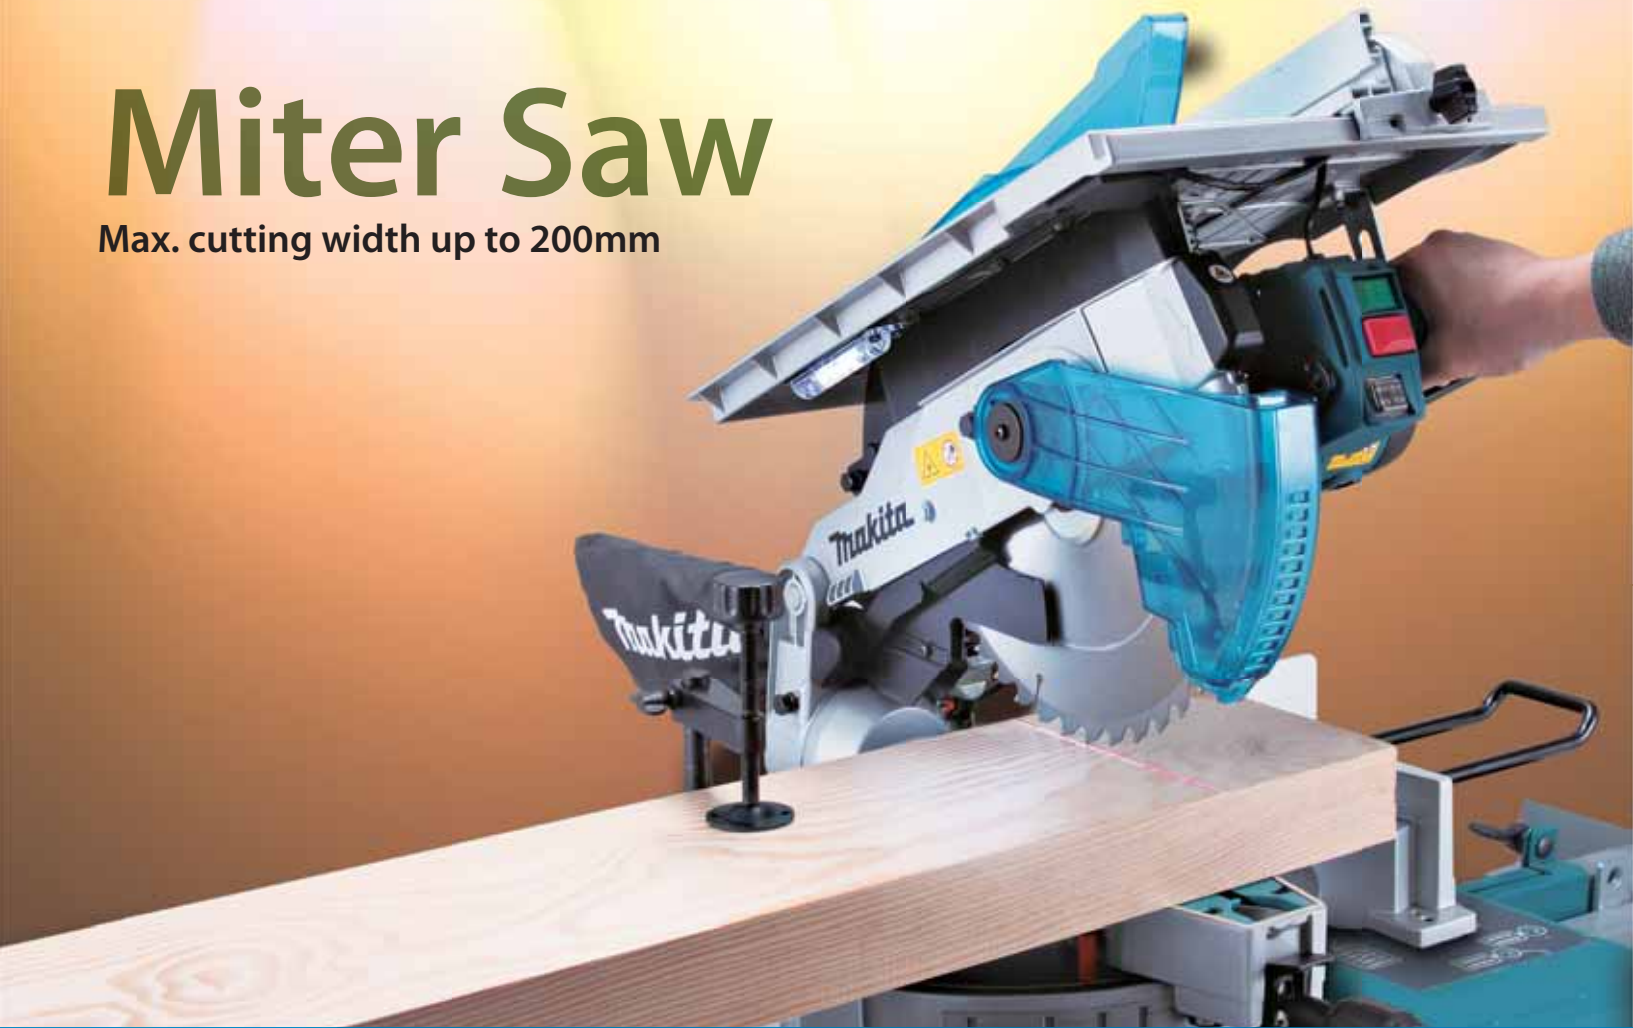

2 tools in 1 for convenience and versatility

# Table Saw

Max. cutting thickness 52mm



# Large Cutting Capacity

Max. cutting 200mm X 62mm (Width x Height)

Able to cut two layers of 192mm x 23mm wood floorings in a single stroke. (Width x Height)



Soft start feature prevents the breaker from tripping at job sites.

Anti-restart switch protects user from accidental restart.

Sturdy cast aluminum table



Bevel Cuts 45 degrees left

47 degrees Left

52 degrees Right




Laser marker allows for easy ink line alignment.



4 LED job lights provides a clear view of ink line even in dark places when the tool is used as a miter saw.



Removable Guide rule enables to cut thin and wide materials.



## Cutting capacity as Miter Saw

Bevel angle	Miter angle	Cutting capacity (Height x Width)
0°	0°	62 x 200mm (2-7/16" x 7-7/8") 95 x 155mm (3-3/4" x 6-1/8")
45°	0°	40 x 200mm (1-9/16" x 7-7/8") 64 x 155mm (2-1/2" x 6-1/8")
0°	45° Left/ Right	62 x 135mm (2-7/16" x 5-5/16") 95 x 110mm (3-3/4" x 4-5/16")
45°	45° Left	40 x 125mm (1-9/16" x 4-7/8") 64 x 65mm (2-1/2" x 2-9/16")
45°	45° Right	40 x 125mm (1-9/16" x 4-7/8") 64 x 65mm*1 (2-1/2" x 2-9/16")*1

## Cutting capacity as Table Saw

52mm (2-1/16") (thickness)

## Table Top Miter Saw

## LH1200FL 305mm (12")

- Double Insulation
- Brake
- Soft Start
- Bevel Cutting
- Laser Marker
- Dust Collecting
- Built-in Job Light

<b>Continuous rating Input</b>	1,650W
<b>Max cutting capacity</b>	at 0 degrees : 95x155mm (3-3/4"x6-1/8") at 45 degrees : 64x155mm (2-1/2"x6-1/8")
<b>Blade diameter</b>	305mm (12")
<b>No load speed (rpm)</b>	3,800
<b>Dimensions (L x W x H)</b>	610x535x692mm (24"x21"x27-1/4")
<b>Net Weight*</b>	20.7kg (45.6lbs)
<b>Power supply cord</b>	2.5m (8.2ft)

### Standard Equipment:

TCT Saw Blade, Vertical Vise, Dust Bag, Guide Rule Assembly, Ring, Triangle Rule, Push Stick, Blade Cover, Socket Wrench, Holder Set

\*1 with 35mm (1-3/8) auxiliary wood facing

\*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BC-AC