



Clean Cutting

- Splinter-free cutting
- Connectable to Vacuum Cleaner

Plunge Cut Circular Saw 165mm (6-1/2")

SP6000

Depth Stopper for Splinter-free Cutting

Enables to easily cut a preliminary groove at a depth of 2mm (1/16") for splinter-free cuts.



Unclean Cutting


Splinter-free Cutting

Tip-Resistant Design



Sliding the lever prevents this tool from falling down towards blade case.

Bevel Cut




Bevel Range
:: -1 to 48 degrees

Precision Bevel Cut

The position of cutting line is always the same regardless of bevel angle in cutting with Guide Rail attached.

Positive Stopper

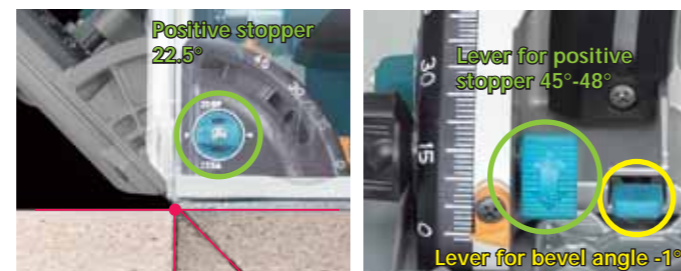

Close-to-Wall Cutting



Only 18mm (11/16") away from wall at minimum

Guide Rule (Sub Base)

can be installed.

Supplied with Model SP6000.
An option for Model SP6000K.
Part No. 165447-6



Guide Rule can be used as Sub Base by turning up side down.

Optional Accessory

Guide Rail

1,400mm or 3,000mm
Part No. 194368-5 Part No. 194367-7

Clamp Set

Part No. 194385-5

Carrying Case

Supplied with Model SP6000K.
An option for Model SP6000.
Part No. 824783-6

Bevel Guide Set

Adjustable angle of Guide Rail
Part No. 194433-0

T.C.T Saw Blade

Size	Part No.	
165 x 20mm 56T	B-07440	for aluminum
165 x 20mm 48T	B-07353	for wood
165 x 20mm 28T	B-07434	for wood

