

Accessories



1. Dust extractor attachment

Part No. 193472-7
Use with Hose 28-1.5 Part No. 192278-0



2. Dust cup set

Part No. 194580-7
Use with Grip base set Part No. 194582-3




3. Dust cup

Bit dia 6-14.5mm Part No. 421342-3
Bit dia 12-16mm Part No. 421664-1
(Protects operator from dust and debris)



4. Drill chuck assembly (13mm)

Part No. 122574-2
Use with Chuck key Part No. 763432-9



5. Chuck adapter assembly

Part No. 122573-4
With screw M6 x 22



6. Battery protector

Part No. 194649-7



8. Hammer service kit


Part No. 188582-3

Comparison of Efficiency

Note: 1. The test results depend to a great extent on the hardness of the material, etc.

2. Numbers in the charts below are relative values when the capacities of Competitor "D" is indexed at 100.

Test Material: Concrete with compressive strength of 40N/mm²

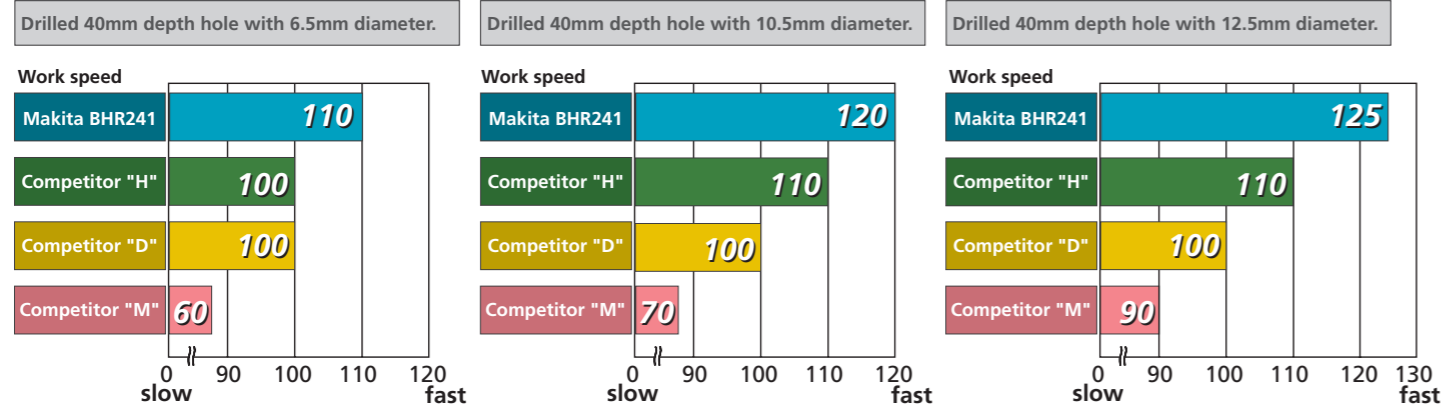

Cordless Combination Hammer

BHR241 20mm (13/16")

- Variable Speed
- Reversing
- Electric Brake
- Torque Limiter
- Dust Collecting
- SDS-Plus Shank
- Carrying Case



Capacity	Concrete : 20mm (13/16") Steel : 13mm (1/2") Wood : 26mm (1")
Impacts per minute	0-4,000ipm
No load speed	0-1,100rpm
Dimensions (L x W x H)	417 x 84 x 219mm (16-3/8" x 3-5/16" x 8-5/8")
Net weight	3.2kg (7.0lbs)
Voltage	18V

Standard Equipment
Fast Charger, Battery Cartridge, Side Grip,
Depth Gauge (Tool does not come with bit.)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23413-Z AI-BA




Satisfy Professional's Needs
Cordless Combination Hammer
BHR241 20mm (13/16") SDS-Plus Shank




THE TOUGHNESS




DRASTICALLY ENHANCED DURABILITY

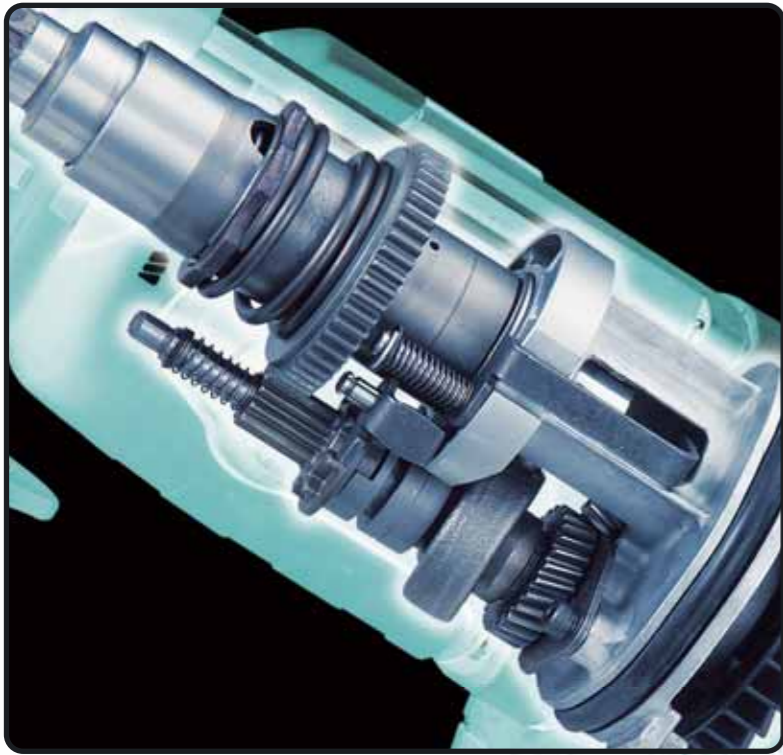

/// Added durability to impact bolt

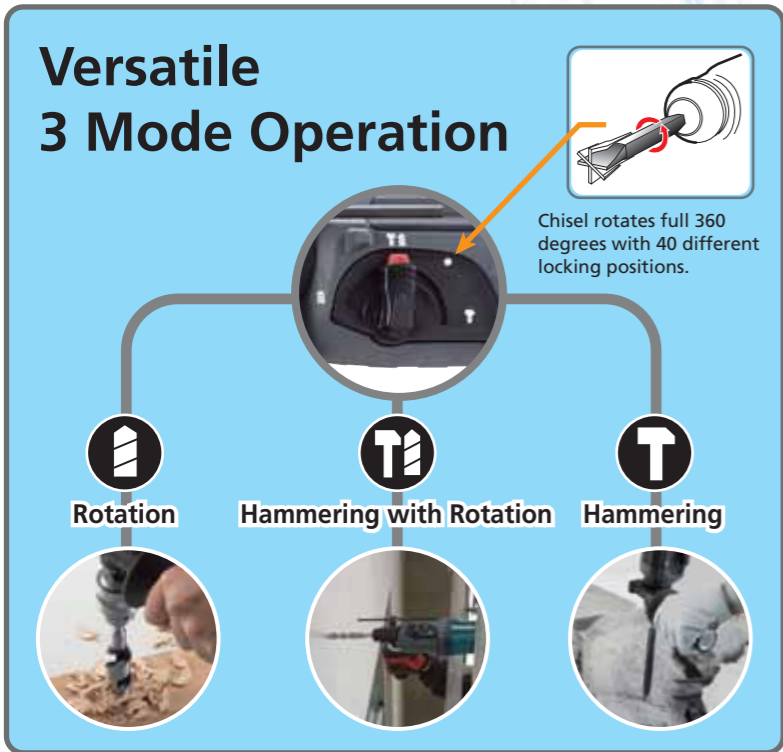

One-touch sliding chuck for easy bit changes

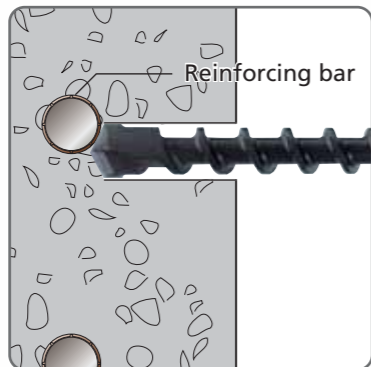


Torque limiter :: When drill bit hits against reinforcements, Torque limiter operates to stop.

Light weight at only **3.2kg (7.0 lbs)**

Cordless Combination Hammer BHR241

18V 3.0Ah LITHIUM-ION

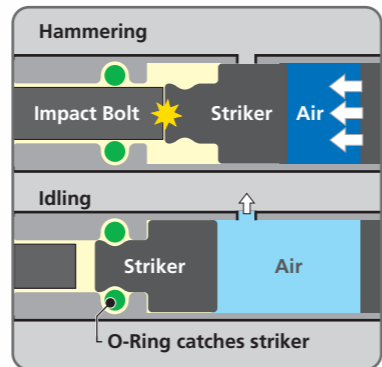

No hammering when idling ensures machine's long life.



1 Reversing switch operable by one hand
2 Variable speed control switch

Bumper protects the surface of workpiece and machine.

Ergonomic D-shaped Handle

Rubberized soft grip provides more control and comfort.

SDS-Plus shank (Tool does not come with bit.)



Unique rubber joint construction

suppresses the transmission of vibration to battery terminals, minimizing battery failures such as terminal breakage or poor electrical contact. The tool body is separated into the upper and lower housings at the foot of handle portion where the housings are jointed with vibration absorbing cushion rubbers.