



Rotary Hammer with Dust Extraction

HR2432 24mm (1")



***The best rotary hammers for clean working conditions.***

# 24mm Rotary Hammer with Dust Extraction

## HR2432



### Features Dust Extraction, Ensuring Clean Operation.

Dust extraction efficiency is greatly increased with Large dust bag and Big fan. Ideal one for overhead application or house-remodeling jobs to which dust is a nuisance.



**Big Fan Provides Incredibly High Dust Extraction Power.**

### Durable Hose




**Elbow-shaped nozzle prevents the hose from dangling down to reduce the possibility of hose breakage.**

### Clean Operation

**[Test conditions]** Material : Concrete  
Diameter of bit : 10mm / Depth of hole : 50mm

**[Test Results]**

**Competitor "H":** Meshes of the dust were clogged when 40 holes were drilled, and the test had to be stopped for cleaning the meshes of dust bag.  
**Makita HR2432 :** Due to the enlarged dust bag, it took more time until meshes of the dust bag were clogged. Consequently, the extraction power did not drop.

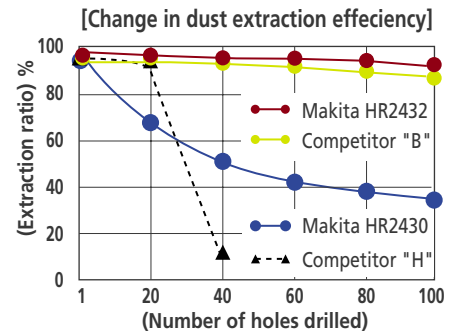

### Incredible Job Efficiency

**[Test conditions]**

Material : Concrete with compressive strength of 35N/mm<sup>2</sup>  
Bit diameter : 10.5mm

Working mode : Rotation with hammering

Note : Numbers in the chart are relative values when the capacity of competitor "B" is indexed at 100.

HR2432	115
Competitor "B"	100
Competitor "H"	100

## SPECIFICATIONS

419mm

<b>Power Input</b>	780 W
<b>Capacities</b>	Concrete (T.C.T. Bit diameter) : 24 mm (15/16") Concrete (Max. core bit diameter) : 65 mm (2-9/16") Steel : 13 mm (1/2"), Wood : 32 mm (1-1/4")
<b>Blows per minute</b>	0-4,500
<b>No load speed</b>	0-1,000 rpm
<b>Dimensions (L x W x H)</b>	407 mm x 120 mm x 220 mm (16" x 4-3/4" x 8-3/4")
<b>Net weight</b>	3.0 kg (6.6 lbs)
<b>Power supply cord</b>	4.0 m (13.1 ft.)

Specifications may differ from country to country.

## STANDARD EQUIPMENT

	Part No
Side grip	152521-9
Cap	421727-3
Dust bag	122708-7

Standard equipments may differ from country to country.

Double Insulation

Variable Speed

Reversing

Torque Limiter

Adapted for SDS-PLUS bits

Carrying Case